



Dinam LED Limited, Dynamic lighting for colorful life

SPECIFICATION

SMD LED FLUORESCENT



Dinam LED Limited

Web: www.dinamled.com

Email: info@dinamled.com

Contact: Luisa


Phone: +86-755-23020300

Mobile: +86-13600151478

Address: B Building, Chuangfu Industrial Zone, Beihuan Road,


Shiyuan Town, Baoan District Shenzhen China.

LED Fluorescent

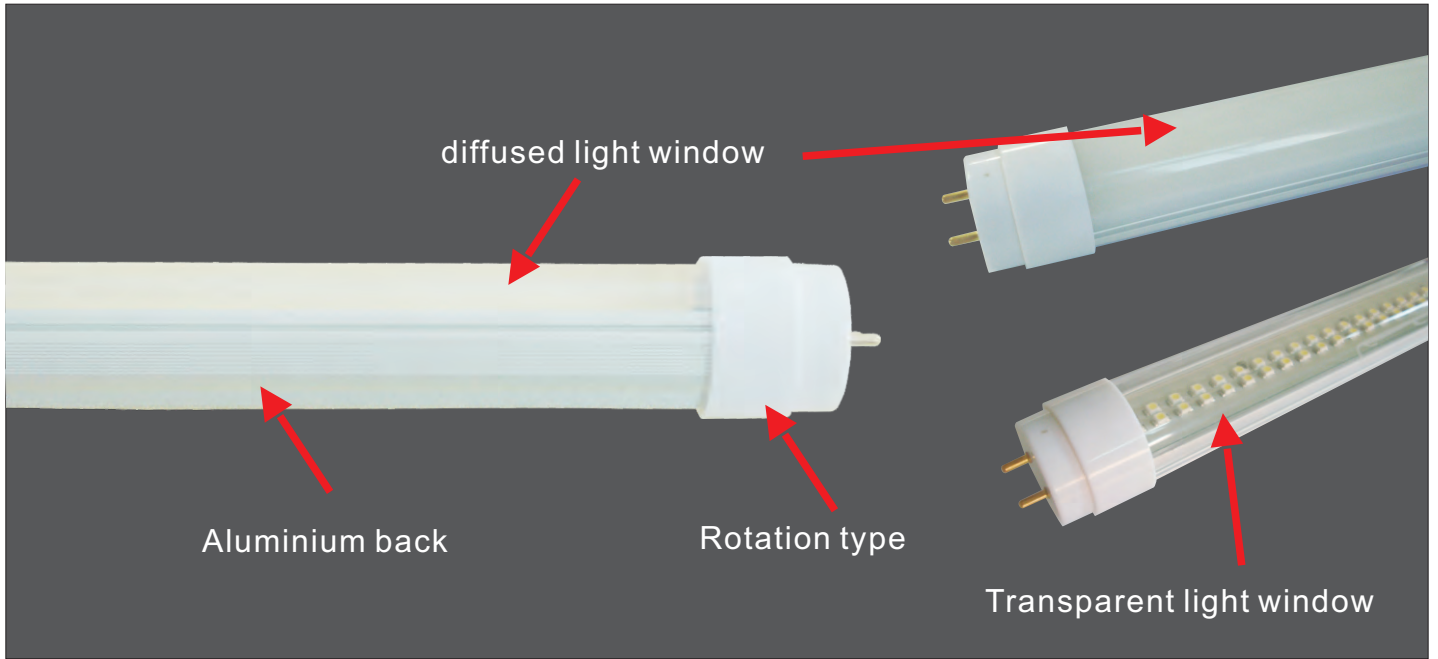

Features:

- A: Energy saving, Half power consumption at same illuminance.
- B: Good environmental protection, without HG, ultraviolet, infrared rays
- C: Long life, more than 50,000 hours life span.
- D: Directly replace traditional fluorescent replacement.
- E: CE, ROHS, FCC Certificate.

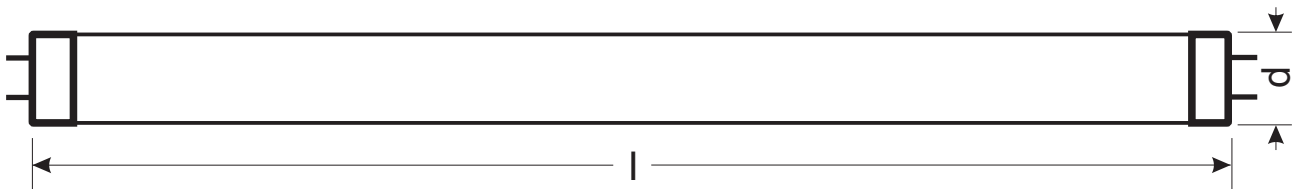

SN	W			LM				
FT-T8TAT120A-W	21	White	Transparent	1850	26	1195	20	288
FT-T8TAT120A-CW		Cool white		1900				
FT-T8TAT120A-WW		Warm white		1800				
FT-T8DAT120A-W	21	White	Diffused	1700	26	1195	20	288
FT-T8DAT120A-CW		Cool white		1750				
FT-T8DAT120A-WW		Warm white		1650				


Note: TLA is transparent light window ;
 TLAD is diffused light window;

TLAS is Stripe light window;

LED Fluorescent



Absolute Maximum rating at Ta=25 degree		
Parameter	Rating	Unit
Power factor	0.945	
Light Angle	114.5	°
operating temperature range	-20 to +50	°C
storage temperature range	-30 to +80	°C

Dimension

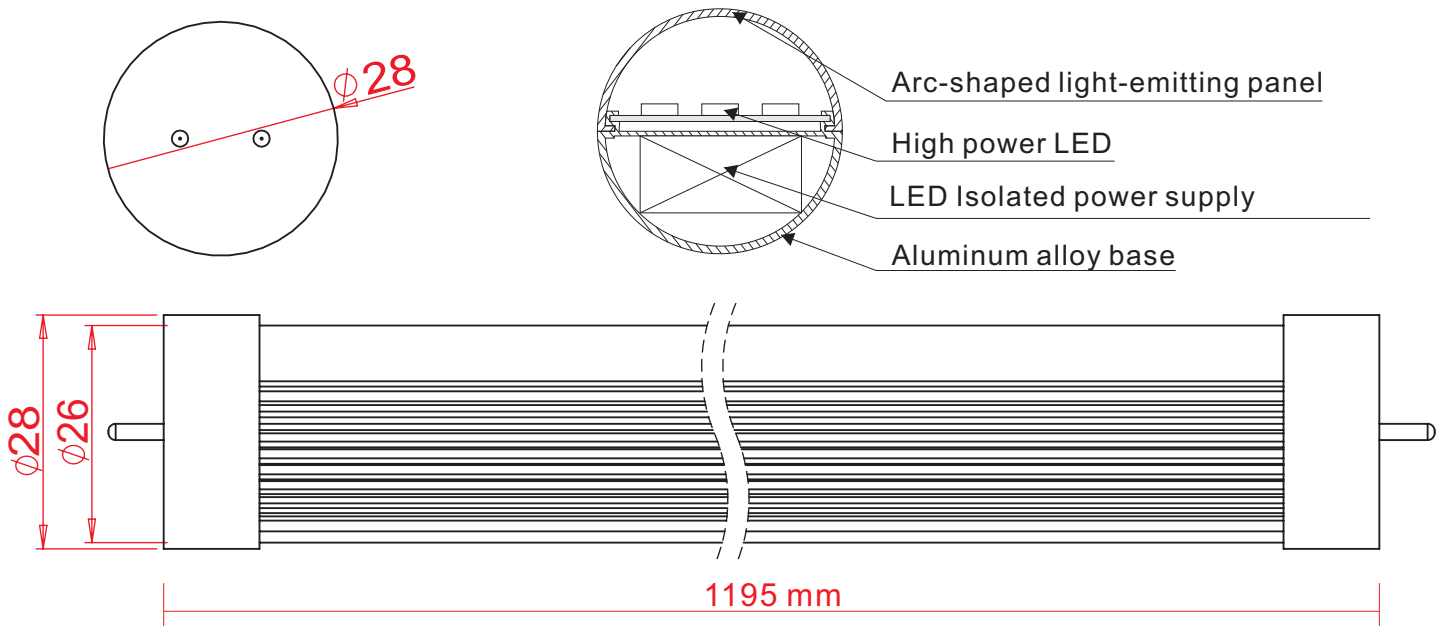

1. All dimensions are in millimeters
2. Tolerance is ± 2 mm unless otherwise noted

How to use

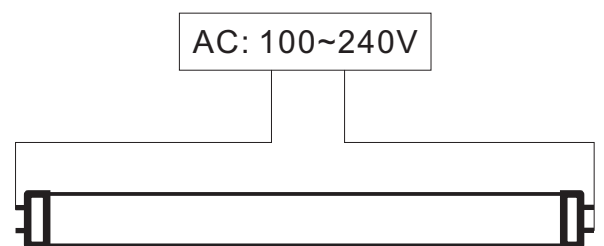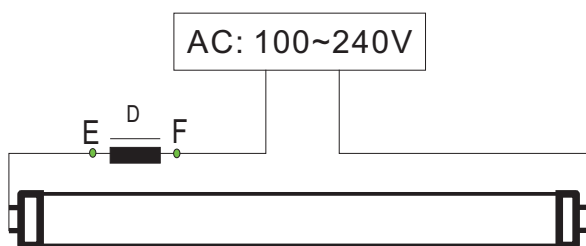

Directly replace conventional fluorescent tubes

standard application


1: Ballast (as indicated as "D"), if

- 1.1 the ballast is digital type, it must be removed away and short the cable there and reconnect pt E and pt F.
- 1.2 the ballast is conventional type, it can be kept there without any modification but have to screw off the starter before on

2: It is recommended to have the installation by qualified electrician.

LED Fluorescent packing

● Packing

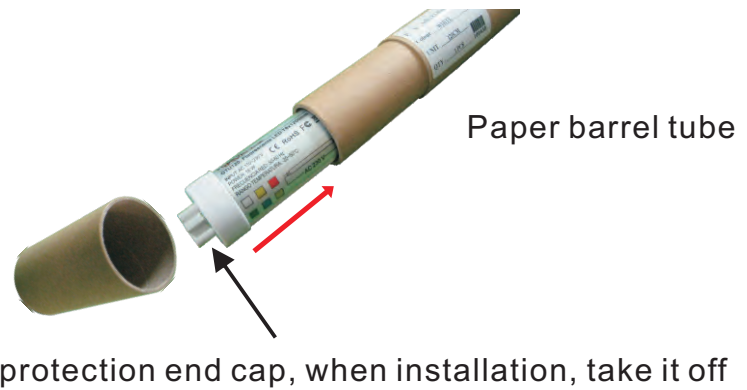

1250 mm



Box:



Products (Size)	Paper barrel tube (Size)	Box (Size)	Packing	Weight
1200mm(T10)	Ø44X1250 mm	1280X230X200mm	20 pcs	14.5 kg