



Dinam LED Limited, Dynamic lighting for colorful life

PRODUCTS SPECIFICATION

3528 SMD RIGID BAR SERIES

For DN-R35281708W180-12V



Dinam LED Limited

Web: www.dinamled.com

Email: info@dinamled.com

Contact: Luisa

Tel: +86-755-23063529

Fax: +86-755-22700020

Mobile: +86-13600151478

Mobile: +86-13560459594

Address: B Building, Chuangfu Industrial Zone, Beihuan Road,
Shiyan Town, Baoan District, Shenzhen, China.

180LED Rigid bar Introduction

Features:

Available in 12V DC maximum.


Very bright & low power consumption.

Operating temperature: -20~50°C.

Long life span LED lights, more than 50,000 hours +.


Water-proof, IP20.

Photos

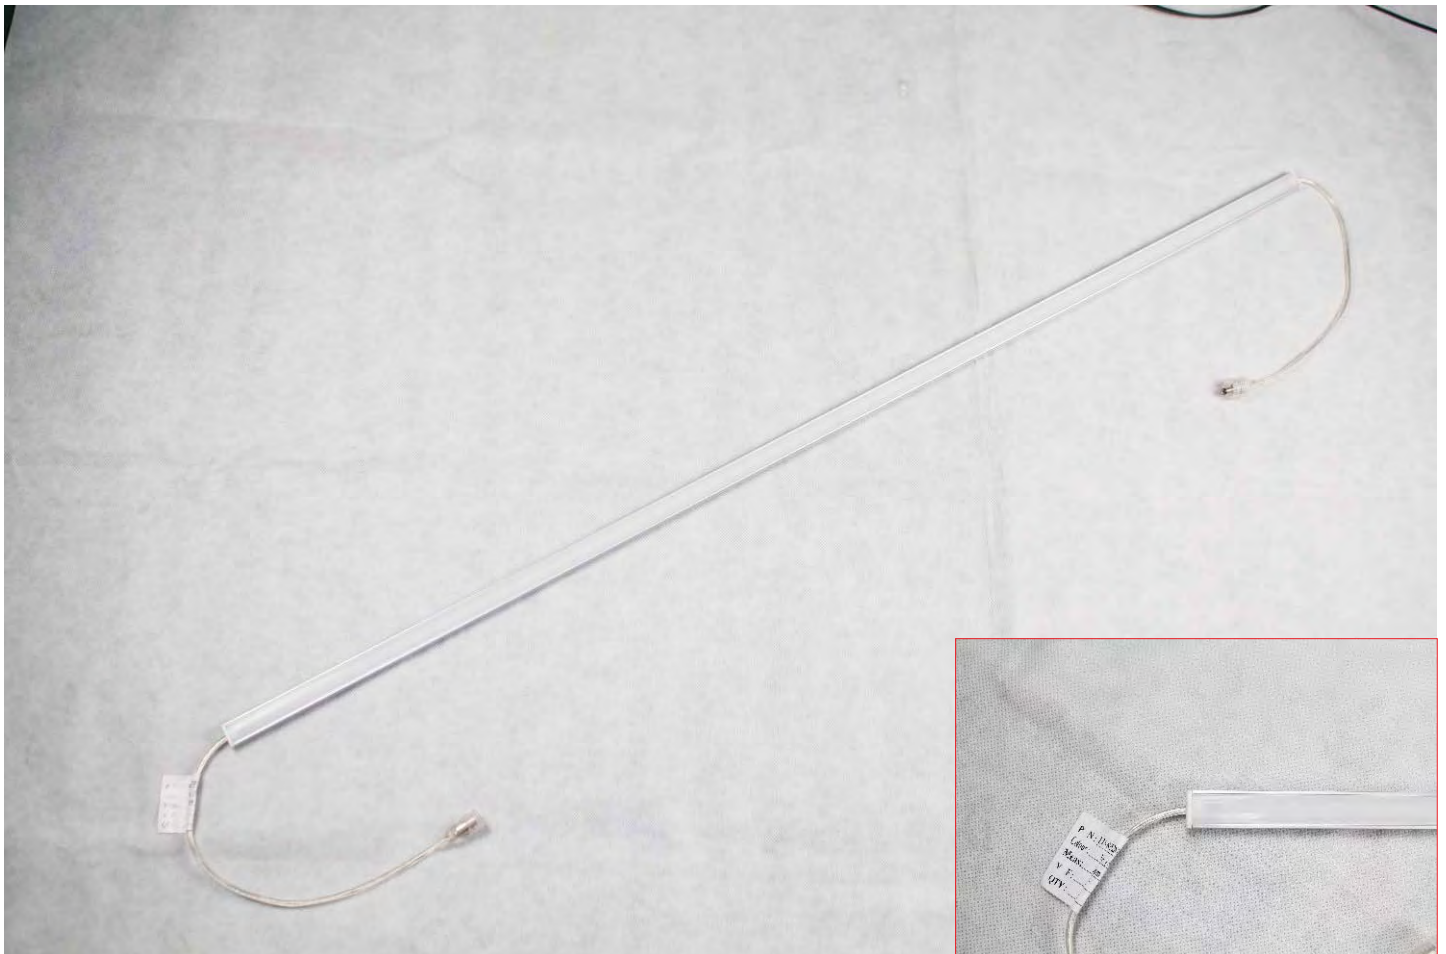

Assembly drawing

Top View

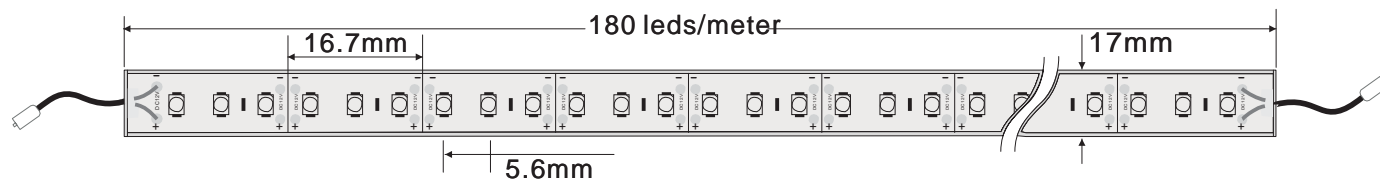

Section




View Angle: 120degrees

Operation Temperature: -20~50°C


Store Temperature: -30~80°C

3528 Rigid bar: 180 LED/Meter:

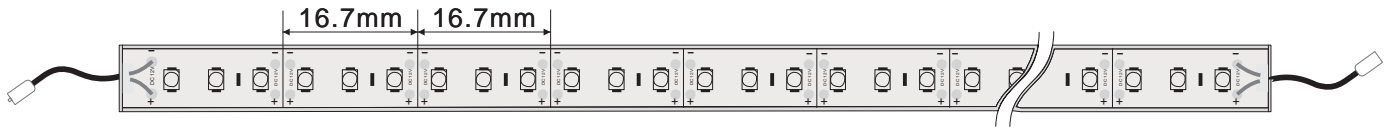


Milky white mask PC cover or Transparent PC cover


Aluminium shell

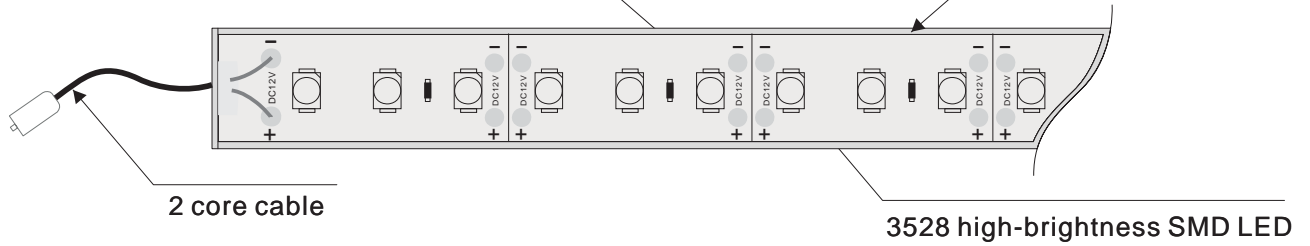


These strips are widely used in shop and bar illumination, it works at 12V DC, with super bright SMD LEDs, wide view angle, compact size, easy to install, Aluminium PCB holder help you to fix easily. long life span(more than 50000 hours)

Aluminium series: 3528 180 LED/meter					
Part number	Color	LED QTY/meter	Lumen/meter	Voltage	Power/meter
DN-R35281708R180-12V	Red	180	360	DC 12V	MAX14.4W
DN-R35281708Y180-12V	Yellow		360		
DN-R35281708B180-12V	Blue		450		
DN-R35281708G180-12V	Green		720		
DN-R35281708W180-12V	White		720~1080		
DN-R35281708WW180-12V	Warm w hite		630~990		
DN-R35281708P180-12V	Pink		360		

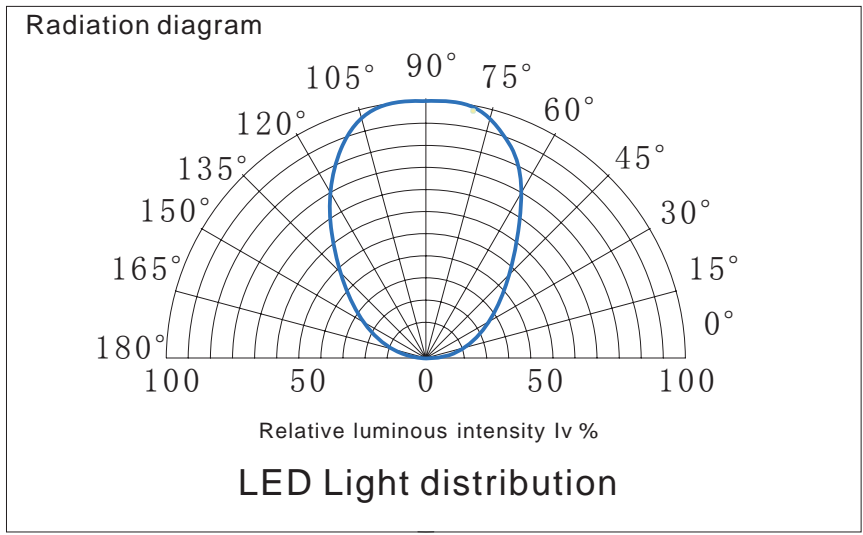

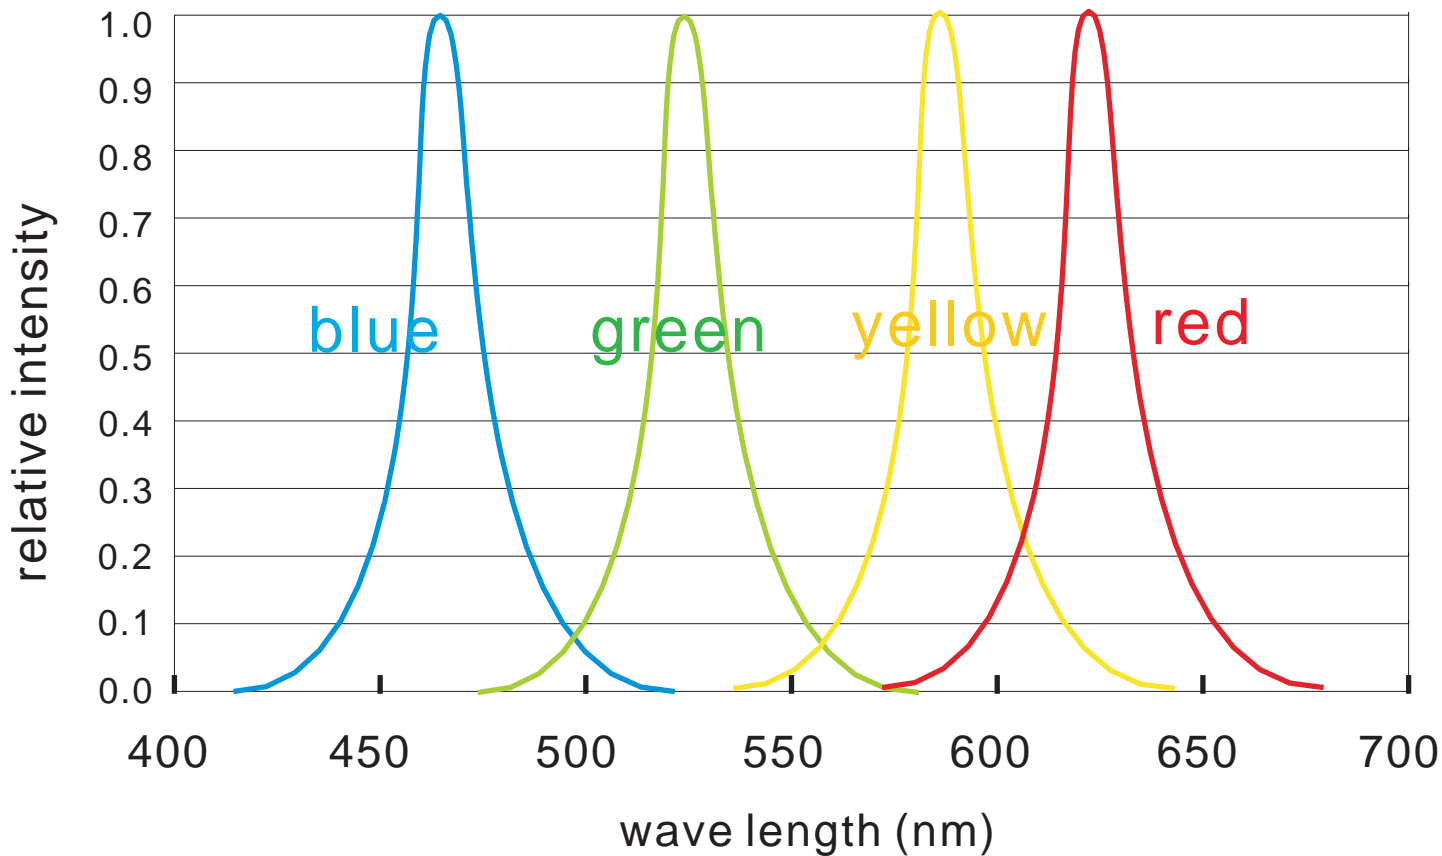

for: red, blue, green, yellow

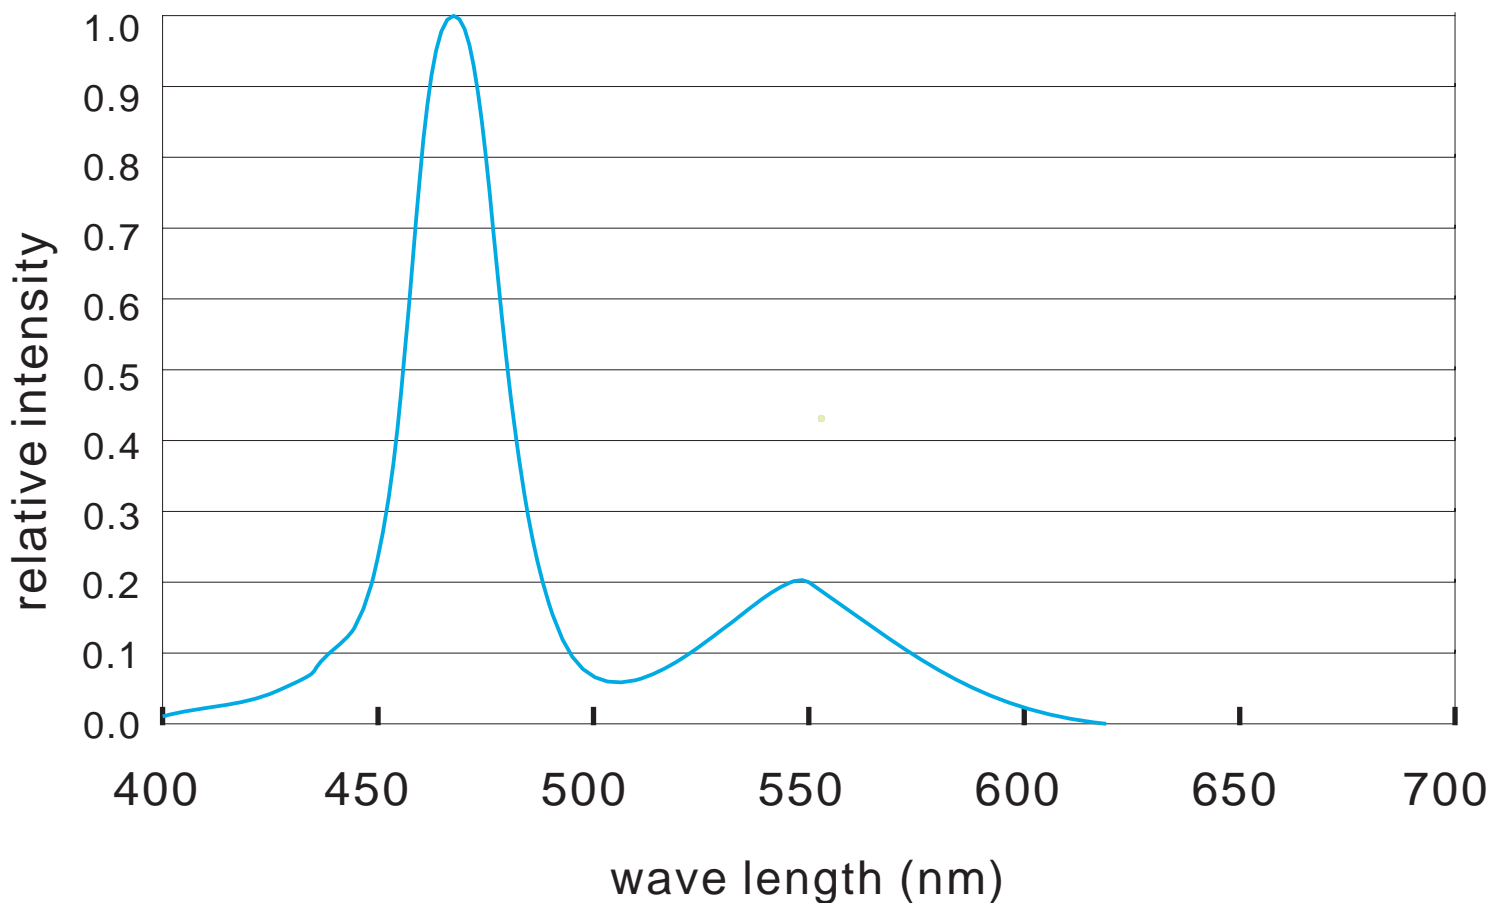

for: white LED

How to connect single color rigid bar

Below shows you how to connect the single color rigid bar to power supplies.

