



Dinam LED Limited, Dynamic lighting for colorful life

PRODUCTS SPECIFICATION

LED Spot Lamp

(Delicate Series)

For LD-SLDA×1



Dinam LED Limited

Web: www.dinamled.com

Email: info@dinamled.com

Contact: Luisa

Tel: +86-755-23063529

Fax: +86-755-22700020

Mobile: +86-13600151478

Mobile: +86-13560459594

Address: B Building, Chuangfu Industrial Zone, Beihuan Road,
Shiyan Town, Baoan District, Shenzhen, China.



Features:

- ★ Delicate -A Series Spot light, adopt the die casting aluminum coating body , high power LED, tensile structure can control beam Angle 10-60 of change, very evenly and uniform, the shell of the spot light can rotate 360 degrees, vertical 30 degrees rotation, adjust exposure surface, good heat dissipation design minimized Lumens depreciation
- ★ Can change the view angle and shine direction.
- ★ No fluorescent flicking, no Hg and lead contamination.
- ★ Operating temperature: -20~50°C.
- ★ Long life span LED lights, more than 50,000 hours +.
- ★ Water-proof, IP20.

Photos:




Physical Dimension

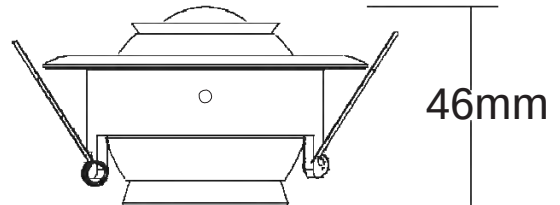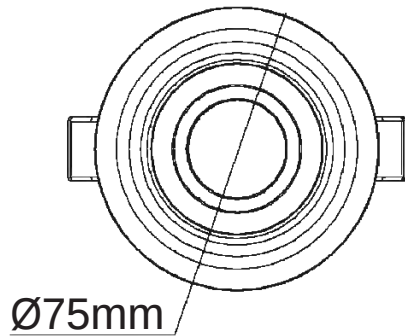


Punch: $\text{Ø}62 \frac{+3}{-0} \text{mm}$

Structure Characteristics


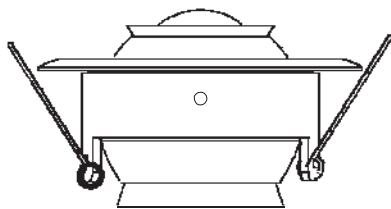


Beam Angle: 60°

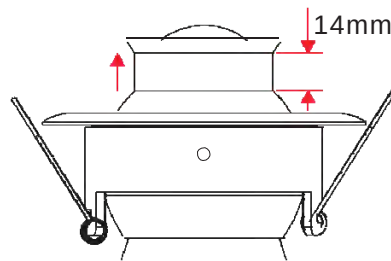

Beam Angle: 10°

Adjust the beam angle from 10°~60°

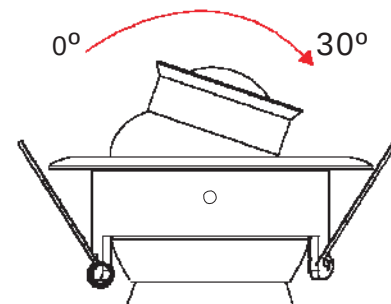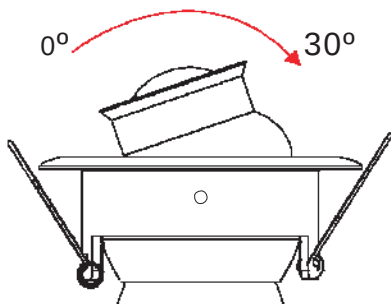

Can change the direction of light

The main Parameter

NUMBER	ITEM	DESCRIPTION
01	Size	Ø75*46mm
02	Rated power	3W
03	LED type	High Power LED
04	CRI	>80
05	Color	Warm white White
06	Luminous flux	145lm(Warm white) 155lm(white)
07	Color temperature	2500~4000k(Warm white) 4000~7500k(White)
08	Life time	≥50,000 Hour
09	Operating temperature	-20°C to + 60°C
10	Storage temperature	-30°C to + 80°C
11	Certificates	CE • RoHS
12	Input voltage	100~240V
13	Punch	Punch: Ø62 $\frac{+3}{-0}$ mm
14	Water proof	IP20
15	Beam Angle	10°~60°

Part number	Color	Current	Power	Luminous Flux
LD-SLDA×1-W	White	700mA	3 W	155lm
LD-SLDA×1-WW	Warm white	700mA	3 W	145lm

How to connect the power

Below shows you how to connect the down lamp to power supplies.

