


5050 120LED Flex




Product features:

- 24V and 12V DC optional
- 600LED, 16.7mm/pitch
- Dimensions: 5,000mm x 20mm x 2mm
5,000mm x 15mm x 2mm
5,000mm x 28mm x 2mm
- Up to 92lm/Watt
- (24V) 6.0A total/ 60mA per step
- (24V) 1.44Watt, 6led/Segment
- Storage temp.: -30~80°C
- Operation Temp.: -20~50°C
- Also available at CRI90
- Dimming: voltage reduction/PWM
- Max connection length: 5 meters (both ends supplied)


24V IP20 Top View

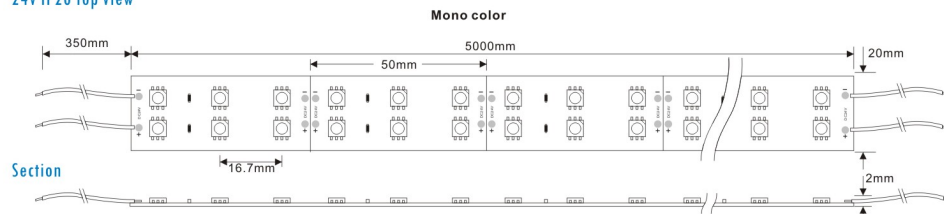

24V IP20 Top View

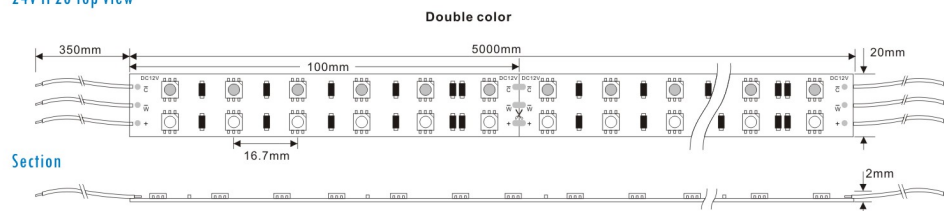

Side View:

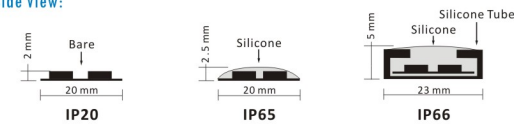

Part No.	CCT / Wavelength*	Color Variance	Bining	Voltage (V DC)**	Power (W/M)	Typ. Flux (LM/M)	Typ. Flux (LM/Watt)	Ra/CRI ***	IP Rated				
DN-F5050WW120-20	2000K	+ / - 150K	4 Step MacAdam	24	28.8	2220	77	56	IP20				
DN-F5050WW120-24	2400K					2280	79	61					
DN-F5050WW120-27	2700K					2340	81	65					
DN-F5050WW120-120	3000K					2400	83	72					
DN-F5050NW120-40	4000K					2580	90	76					
DN-F5050CW120-55	5500K	+ / - 200K	5 Step MacAdam			24	28.8	2640	92	77	IP65		
DN-F5050CW120-65	6500K							2640	92	76	IP66		
DN-F5050RGB120	-	RGB	single bin					24	28.8	R240:G480: B300	-	-	IP67
DN-F5050R120	623nm	red								720	25	-	IP68
DN-F5050Y120	592nm	yellow								720	25	-	
DN-F5050G120	525nm	green		1440	50					-			
DN-F5050B120	470nm	blue		1080	38					-			
DN-F5050C1/C2-120	Double colors			24	28.8 max					-	-	-	

Note: * 10,000K available, amber, orange, pink, purple optional ** 12V DC optional *** Ra80, Ra90 optional