


335 60LED-Side-emitting

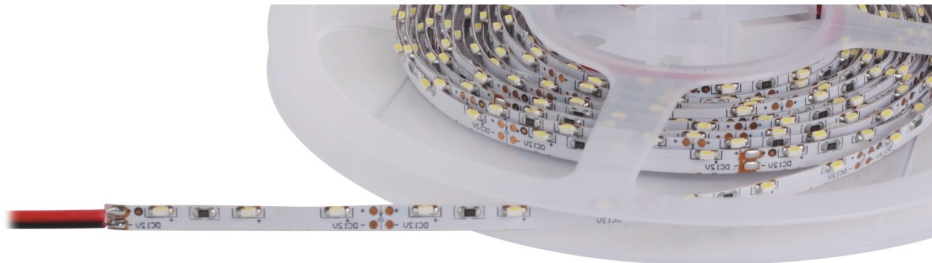


Product features:

- 12V DC
- 300LED, 16.7mm/pitch
- Dimensions: 5,000mm x 5mm x 1.1mm
5,000mm x 8mm x 1.1mm
- 2A / 20mA per step
- 0.24Watt, 3led/Segment
- Storage temp.: -30~80°C
- Operation Temp.: -20~50°C
- Variance: DN-F335X60, 4.8Watt, DC 12V.
- Max connection length: 15 meters (both ends supplied)

Side View



12V IP67 Top View




Section



Accessories:

- Plug Connectors
- Easy to use
- Customized application

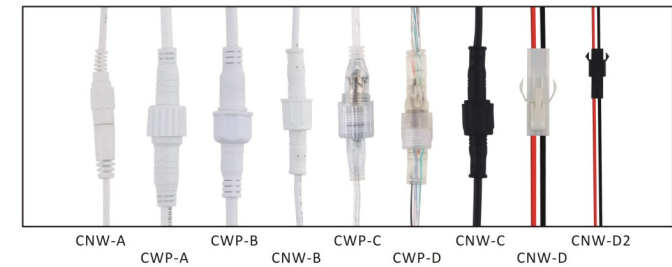

Part No.	CCT / Wavelength*	Color Variance	Bining	Voltage (V DC)	Power (W/M)	Typ. Flux (LM/M)	Typ. Flux (LM/Watt)	Ra/CRI	IP Rated	
DN-F335WW60-20	2000K	+ / - 150K	4 Step MacAdam	12	4.8	294	61	56	IP20	
DN-F335WW60-24	2400K					300	63	60		
DN-F335WW60-27	2700K					312	65	64		
DN-F335WW60-30	3000K					324	68	69		
DN-F335NW60-40	4000K					336	70	70		
DN-F335CW60-55	5500K	+ / - 200K	5 Step MacAdam			348	73	74	IP67	
DN-F335CW60-65	6500K					360	75	72		
DN-F335R60	623nm					red	120	25		-
DN-F335Y60	592nm					yellow	120	25		-
DN-F335G60	525nm					green	240	50		-
DN-F335B60	470nm	blue	single bin	180	38	-				

Note: * 10,000K available, amber, orange, pink, purple optional