



5630 60LED Flex

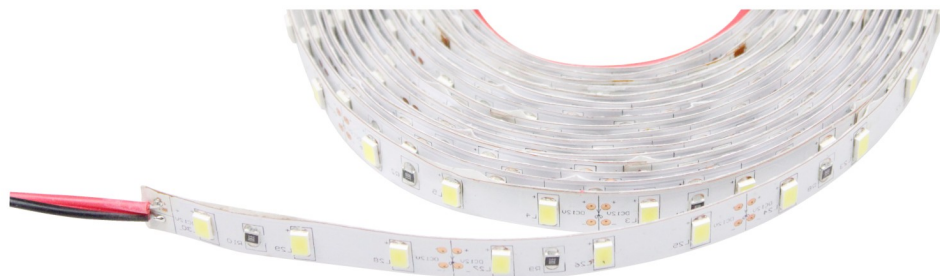


Product features:

- 24V DC and 12V Dcoptional
- 300LED, 16.7mm/pitch
- Dimensions: 5,000mm x 10 mm x 1.6mm
- Up to 88lm/Watt
- (24V) 4A / 80mA per step
- (12V) 8A / 80mA per step
- (24V) 3.96Watt, 6leds /Segment
- (12V) 1.98 Watt, 3led/Segment
- Storage temp.: -30~80°C
- Operation Temp.: -20~50°C
- Also available at CRI 90
- Dimming: voltage reduction/PWM
- Max connection length: 5 meters (both ends supplied)

Side View

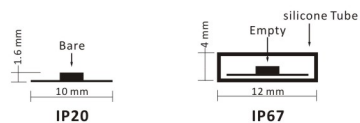

12V IP20 Top View




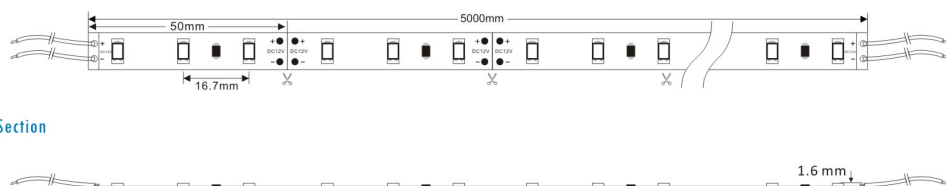


Section



Accessories:

Note: Super bright high power strips are strongly advised to apply with aluminium profiles for heat-dissipation.



Part No.	CCT	Color Variance	Bining	Voltage (V DC) *	Power (W/M)	Typ. Flux (LM/M)	Typ. Flux (LM/Watt)	Ra/CRI **	IP Rate
DN-F5630WW60-24	2400K	+ / - 150K	4 Step MacAdam	24	19.2	1530	80	55	IP20
DN-F5630WW60-27	2700K					1560	81	62	
DN-F5630WW60-30	3000K					1590	83	67	
DN-F5630NW60-40	4000K					1620	84	68	
DN-F5630CW60-55	5500K	+ / - 200K	5 Step MacAdam			1650	86	71	IP67
DN-F5630CW60-65	6500K					1680	88	72	

Note: * 12V DC optional

** Ra80, Ra90 optional