


3528 180LED Flex




Product features:

- 12V DC
- 900LED, 5.56mm/pitch
- Dimensions: 5,000mm x 10mm x 2.2mm
- Up to 81lm/Watt
- (12V) 6.0A / 20mA per step
- (12V) 0.24Watt, 3led/Segment
- Storage temp.: -30~80°C
- Operation Temp.: -20~50°C
- Also available at CRI 90
- Dimming: voltage reduction/PWM
- Max connection length: 5 meters (both ends supplied)

Side View

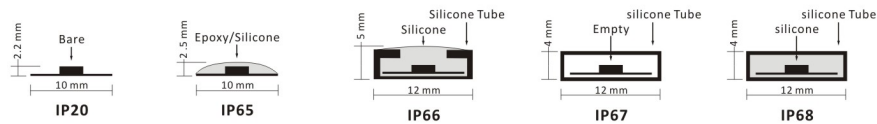

12V IP20 Top View

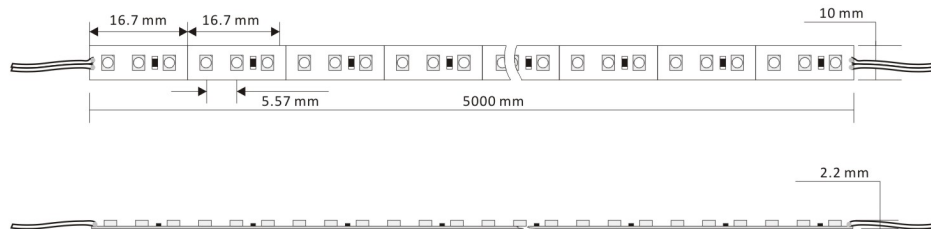

Dinam Flexi tape specification text



Surface mounted flexible LED strip with reflecting white surface and 3M self adhesive tape on rear side. High quality LED from Taiwan. 120° beam angle. Double layer FPC with extra copper layer for advanced thermal management.

Part No.	CCT / Wavelength*	Color Variance	Bining	Voltage (V DC)	Power (W/M)	Typ. Flux (LM/M)	Typ. Flux (LM/Watt)	Ra/CRI **	IP Rated
DN-F3528WW180-20	2000K	+ / - 150K	4 Step MacAdam	24	14.4	936	65	56	IP20 IP65 IP66 IP67 IP68
DN-F3528WW180-24	2400K					972	68	60	
DN-F3528WW180-27	2700K					1134	79	64	
DN-F3528WW180-30	3000K					1116	78	69	
DN-F3528NW180-40	4000K					1152	80	70	
DN-F3528CW180-55	5500K	+ / - 200K	5 Step MacAdam			1152	80	74	
DN-F3528CW180-65	6500K					1170	81	72	
DN-F3528R180	623nm					red	360	25	
DN-F3528Y180	592nm	yellow	single bin			360	25	-	
DN-F3528G180	525nm	green				720	50	-	
DN-F3528B180	470nm	blue		540	38	-			

Note: * 10,000K available, amber, orange, pink, purple optional

** Ra80, Ra90 optional