


# 2835 60LED Flex






### Product features:

- 24V
- 300LED, 16.7mm/pitch
- Dimensions: 5,000mm x 10mm x 1.6mm
- Up to 88lm/Watt
- (24V) 3.0A / 60mA per step
- (24V) 1.44Watt, 6led/Segment
- Storage temp.: -30~80°C
- Operation Temp.: -20~50°C
- Also available at CRI80
- Dimming: voltage reduction/PWM
- Max connection length: 10 meters (both ends supplied)

### Side View

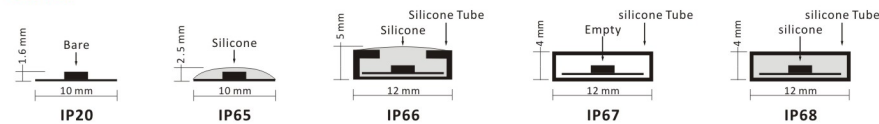

### 24V IP20 Top View

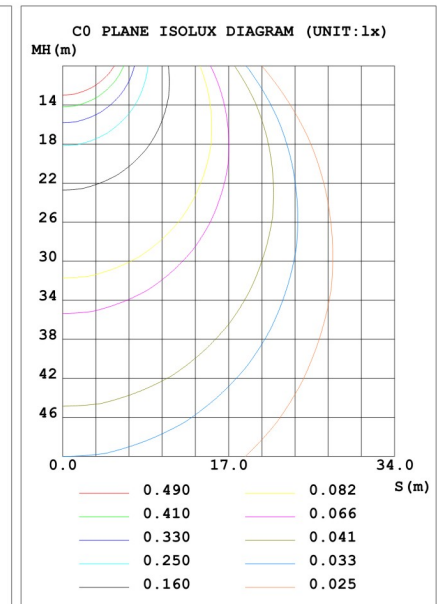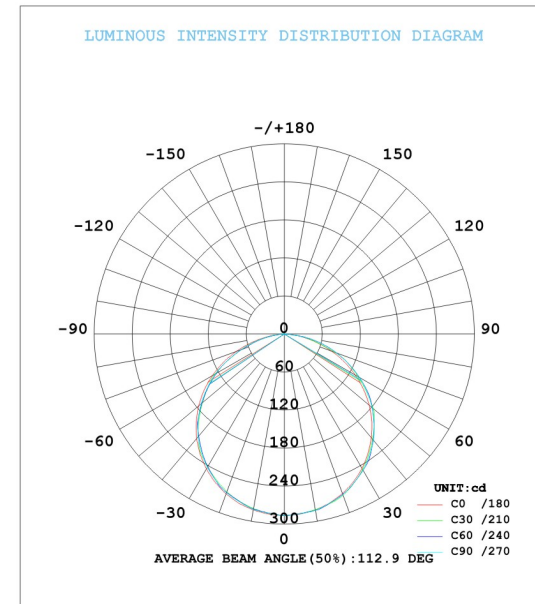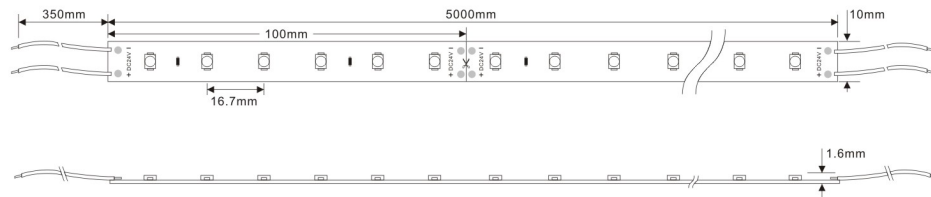

| Part No.        | CCT   | Color Variance | Bining         | Voltage (V DC) | Power (W/M) | Typ. Flux (LM/M) | Typ. Flux (LM/Watt) | Ra/CRI * | IP Rated             |
|-----------------|-------|----------------|----------------|----------------|-------------|------------------|---------------------|----------|----------------------|
| DN-F2835WW60-30 | 3000K | +/- 150K       | 4 Step MacAdam | 24             | 14.4        | 1110             | 58                  | 69       | IP20                 |
| DN-F2835NW60-40 | 4000K |                |                |                |             | 1170             | 63                  | 74       | IP65                 |
| DN-F2835CW60-65 | 6500K | +/- 200K       | 5 Step MacAdam |                |             | 1260             | 88                  | 72       | IP66<br>IP67<br>IP68 |

Note: \*Ra80 optional