


335 96LED-Side-emitting




Product features:

- 12V DC
- 480LED, 10.4mm/pitch
- Dimensions: 5,000mm x 5 mm x 1.1mm
5,000mm x 8 mm x 1.1mm
- 3.2A / 20mA per step
- 0.24Watt, 3led/Segment
- Storage temp.: -30~80°C
- Operation Temp.: -20~50°C
- Dimming: voltage reduction/PWM
- Max connection length: 10 meters (both ends supplied)

Side View



12V IP67 Top View




Section



Accessories:

- Plug Connectors
- Easy to use
- Customized application

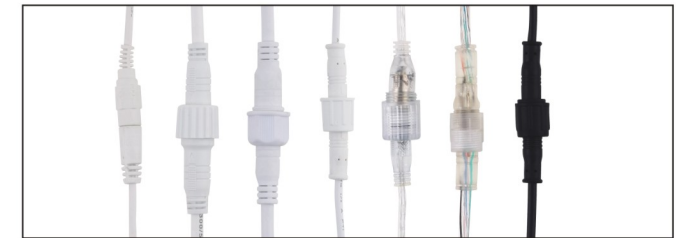

CNW-A CWP-A CWP-B CNW-B CWP-C CWP-D CNW-C

Part No.	CCT / Wavelength*	Color Variance	Bining	Voltage (V DC)**	Power (W/M)	Typ. Flux (LM/M)	Typ. Flux (LM/Watt)	Ra/CRI	IP Rated	
DN-F335WW96-20	2000K	+ / - 150K	4 Step MacAdam	12	7.68	470	61	56	IP20 IP67	
DN-F335WW96-24	2400K					480	63	60		
DN-F335WW96-27	2700K					499	65	64		
DN-F335WW96-30	3000K					518	67	69		
DN-F335NW96-40	4000K					538	70	70		
DN-F335CW96-55	5500K	+ / - 200K	5 Step MacAdam			557	73	74		
DN-F335CW96-65	6500K					576	75	72		
DN-F335R96	623nm					red	192	25		-
DN-F335Y96	592nm					yellow	192	25		-
DN-F335G96	525nm					green	384	50		-
DN-F335B96	470nm	blue	single bin	288	38	-				

Note: * 10,000K available, amber, orange, pink, purple optional ** 24V DC optional