




Dinam LED Limited, Dynamic lighting for colorful life

PRODUCTS SPECIFICATION

3527 SMD LED Bi-Color FLEX STRIP

(Ribbon series)

For DN-F3528X/XX120-24V



Dinam LED Limited

Web: www.dinamled.com

Email: info@dinamled.com

Contact: Luisa

Tel: +86-755-23063529

Fax: +86-755-22700020

Mobile: +86-13600151478

Mobile: +86-13560459594

Address: B Building, Chuangfu Industrial Zone, Beihuan Road,

Shiyan Town, Baoan District, Shenzhen, China.

3527 SMD Bi-Color Flexible strip Introduction

Features:

Available in 24V DC maximum

Very bright & low power consumption

Operating temperature: -20~60°C


Long life span LED lights, more than 50,000 hours+.

Double color controller control.

Non-Waterproof series.


Applications:

Ideal for sign letters and channel letters, concealed lights, room lighting, equipment,

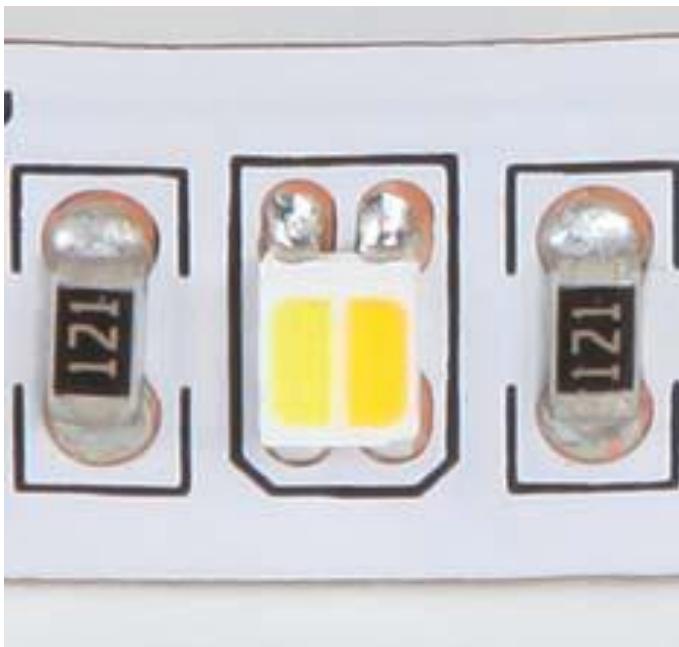

Assembly drawing


Top View

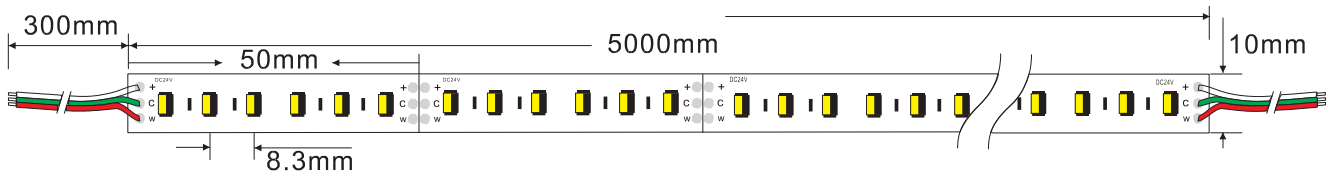

Section



5meter/reel



1 reel/bag



360X240X250mm

25bags/Box


View Angle:120degrees

Operation Temperature:-20~60°C

Store Temperature:-30~80°C


Package: 5 meter strip in one reel, one reel in one anti-static bag, 25 bags put into one carton.

Structure and parameters instructions

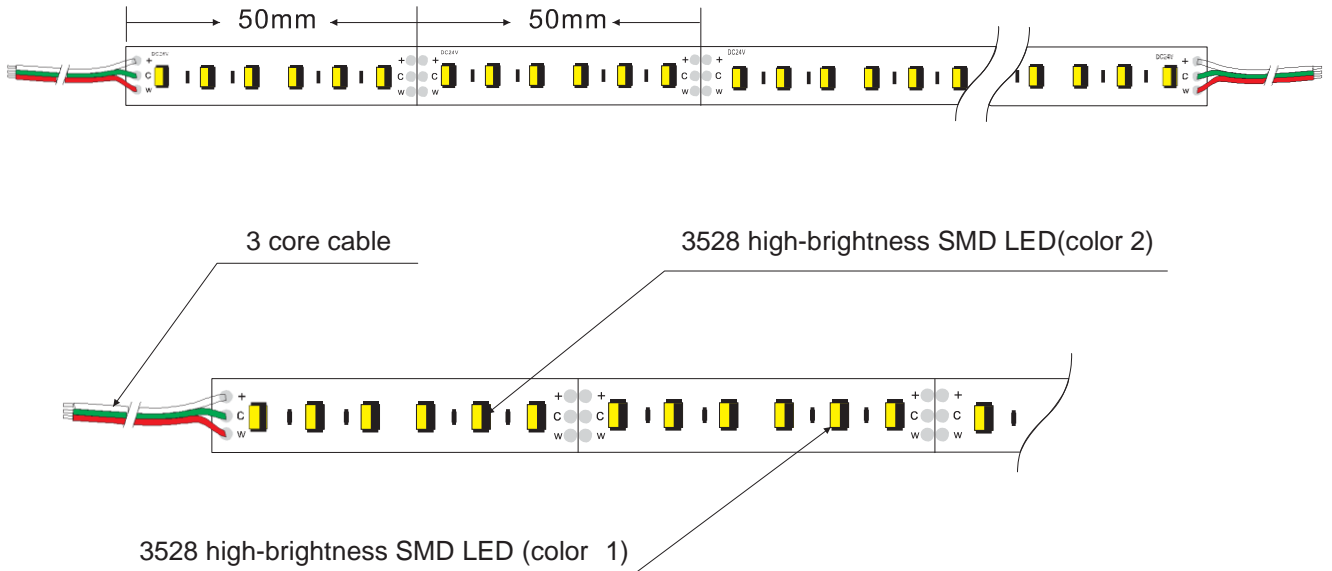

This flexible strip is made of 3527 LED, the PCB holder is Ribbon series strip.

Ribbon series: 3527 LED/meter(DC 24V)						
Part number	Color	LED QTY/meter	Lumen/meter	Voltage	Power/meter	Packing
DN-F3527X/XX120-24V	color 1 <input type="checkbox"/>	120	-----	24V	15.36 watt	5 meter/reel
	color 2 <input type="checkbox"/>					

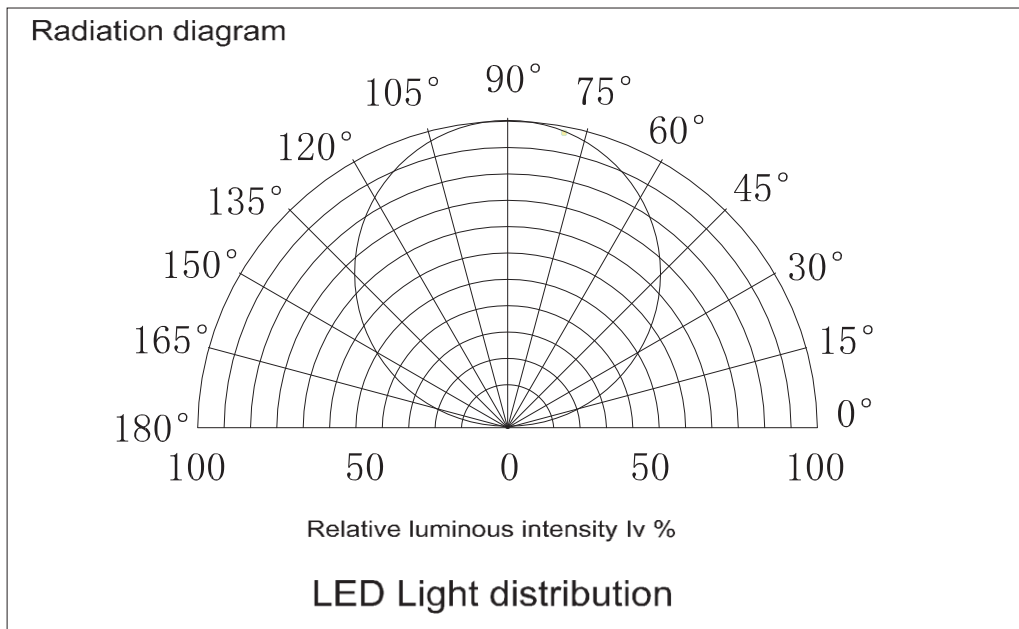

How to connect Flexible strip

Below shows you how to connect the flexible strip to power supplies.

