

Product Specification

3528 LED strip light

(Silicone cased series)

DN-FLW-S3528-12/24-240D

Made by	Checked by	Date	Version
Biao Zhang	Rongwei Li	2014.08.22	A0



SHENZHEN DINAM LED Co., LTD

Phone: 0086-755-2306 3529

Fax: 0086-755-2306 3528

Address: B Building, Chuangfu Industrial Zone, Beihuan Road,
Shiyan Town, Baoan District shenzhen China.

3528 Silicone cased series (240leds/m) feature and photo

Feature:

DC12/24V low-voltage power supply, security and energy efficiency

High brightness low power consumption

Led type: 3528 SMD led

Led lighting angle: 120°

Led quantity: 240leds/m


Operation temperature: -20-50°C

Life time: 50,000hours

Dimmable by using dimmer controller


Water-proof rating: IP65

Photo:

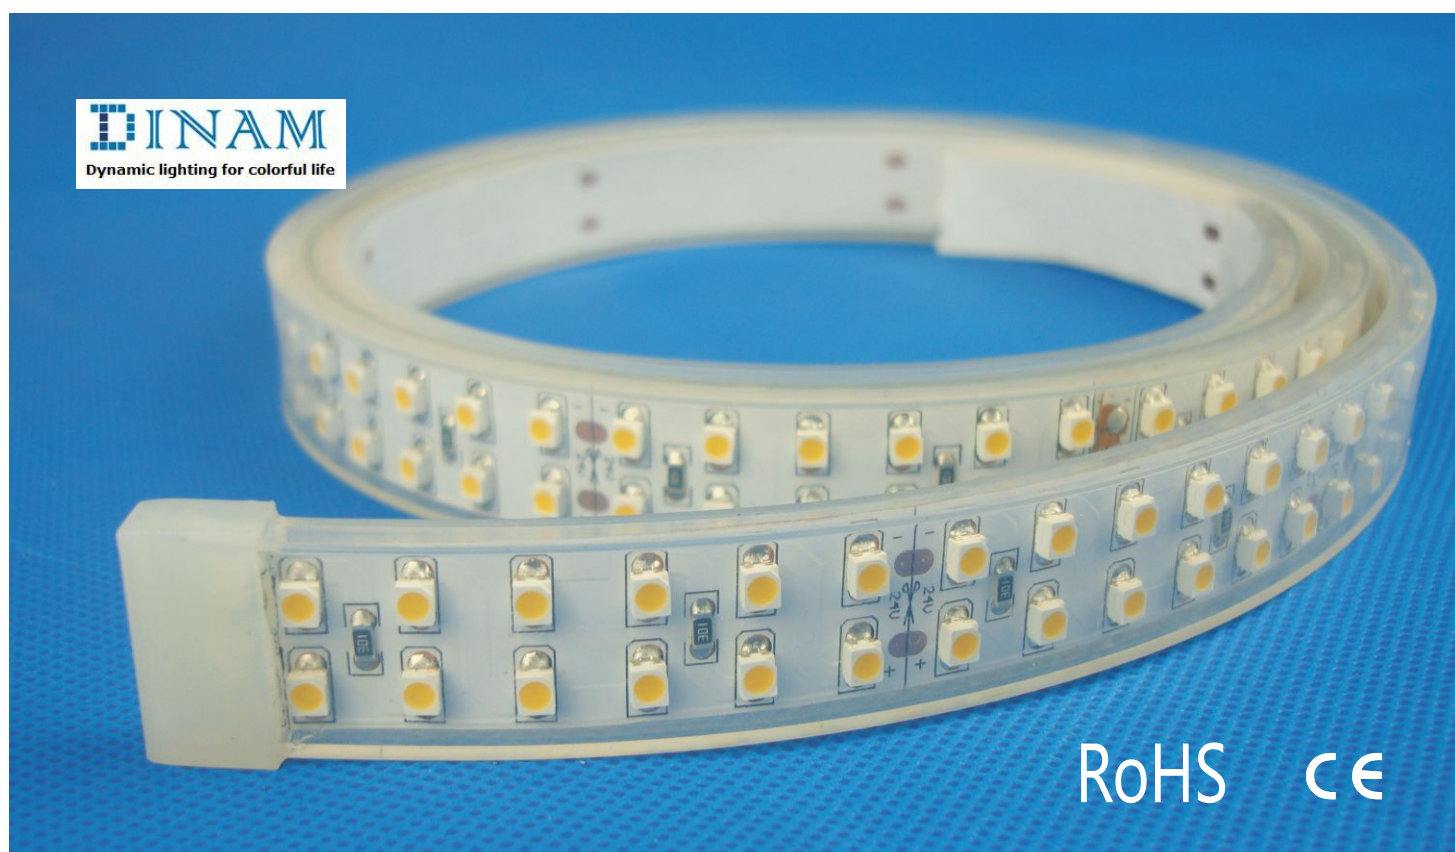

3528 Silicone cased series (240leds/m) dimension chart

Front:

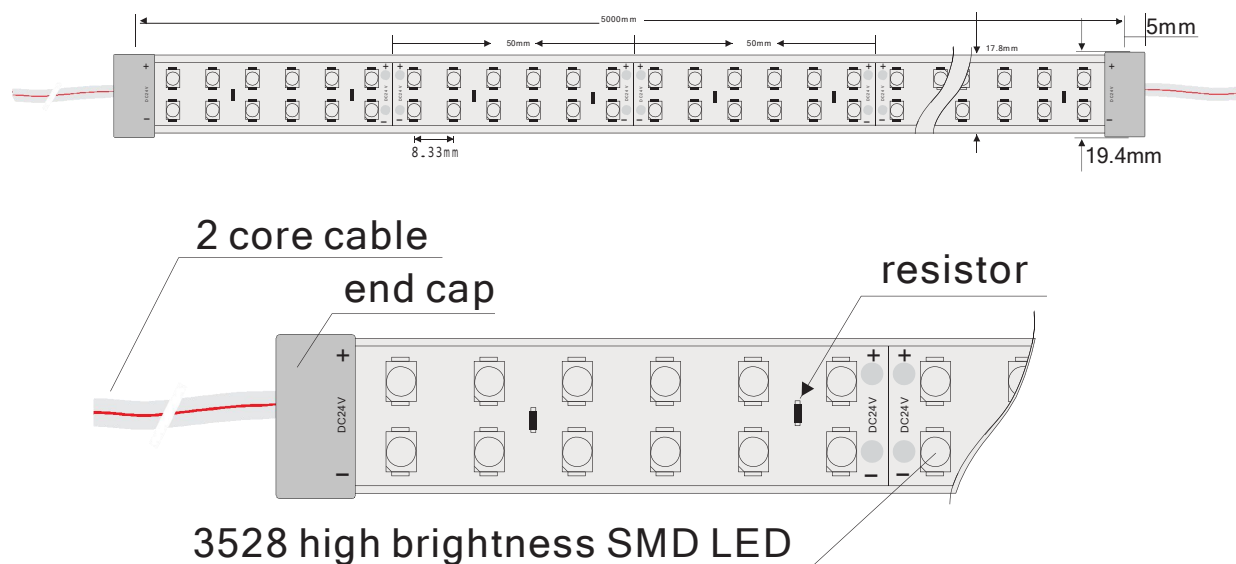



Lateral:




3528 Silicone cased series (240leds/m) photoelectric parameters

Silicone cased series led strip: 3528 SMD 240leds/m DC12/24V power:17.6W $\pm$ 10%/M IP rating:IP65

Part-Number	Color	PCB width	Lumen (CRI>80)	Lumen (CRI>90)
LD-FLW-S3528R/G/B/Y-12/24-240D-AA	R/G/B/Y	15mm	-----	-----
LD-FLW-S3528W-12/24-240D-AA	white	15mm	1260lm/m	940lm/m
LD-FLW-S3528W-12/24-240D-AAA	white	15mm	1300lm/m	1016lm/m
LD-FLW-S3528WW-12/24-240D-AA	warm white	15mm	980lm/m	752lm/m
LD-FLW-S3528WW-12/24-240D-AAA	warm white	15mm	1125lm/m	900lm/m

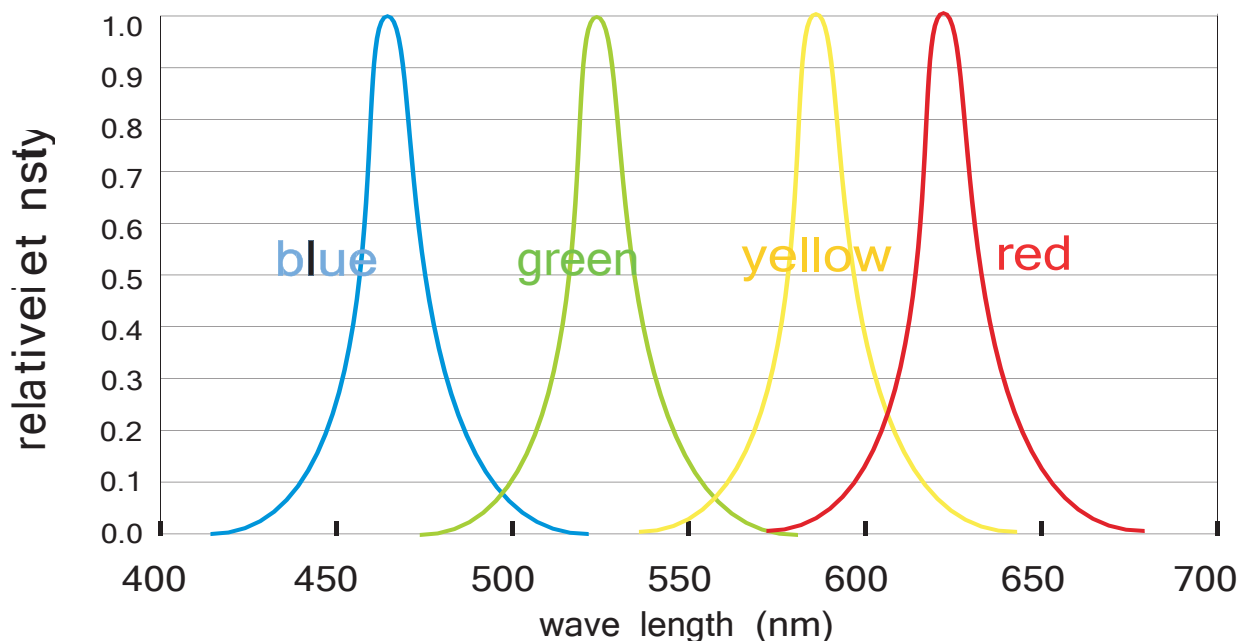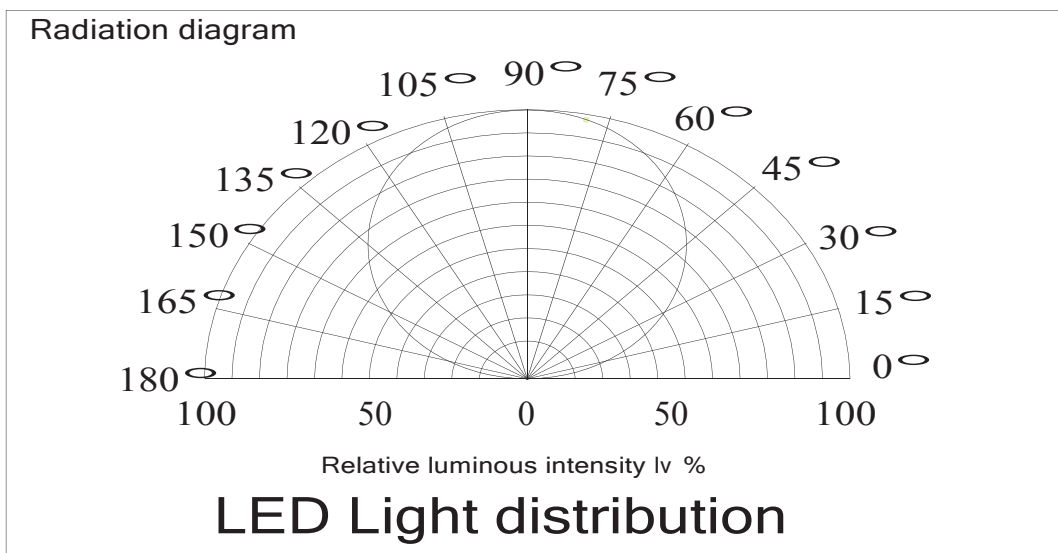


for: red, blue, green, yellow

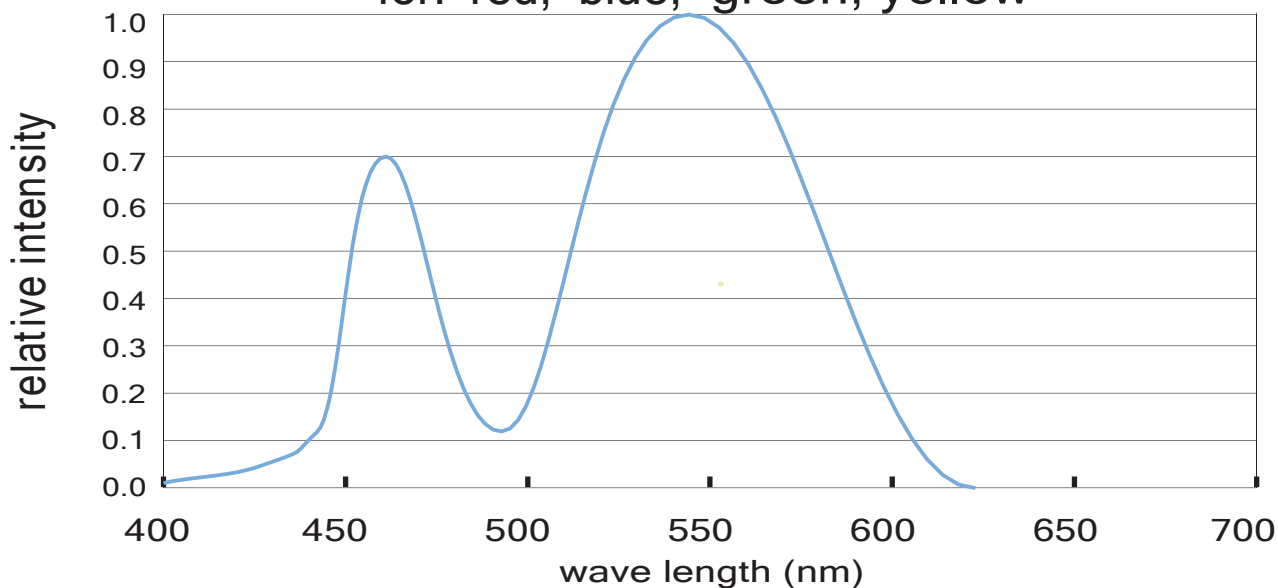


for: white LED

3528 Silicone cased series (240leds/m) connection ways

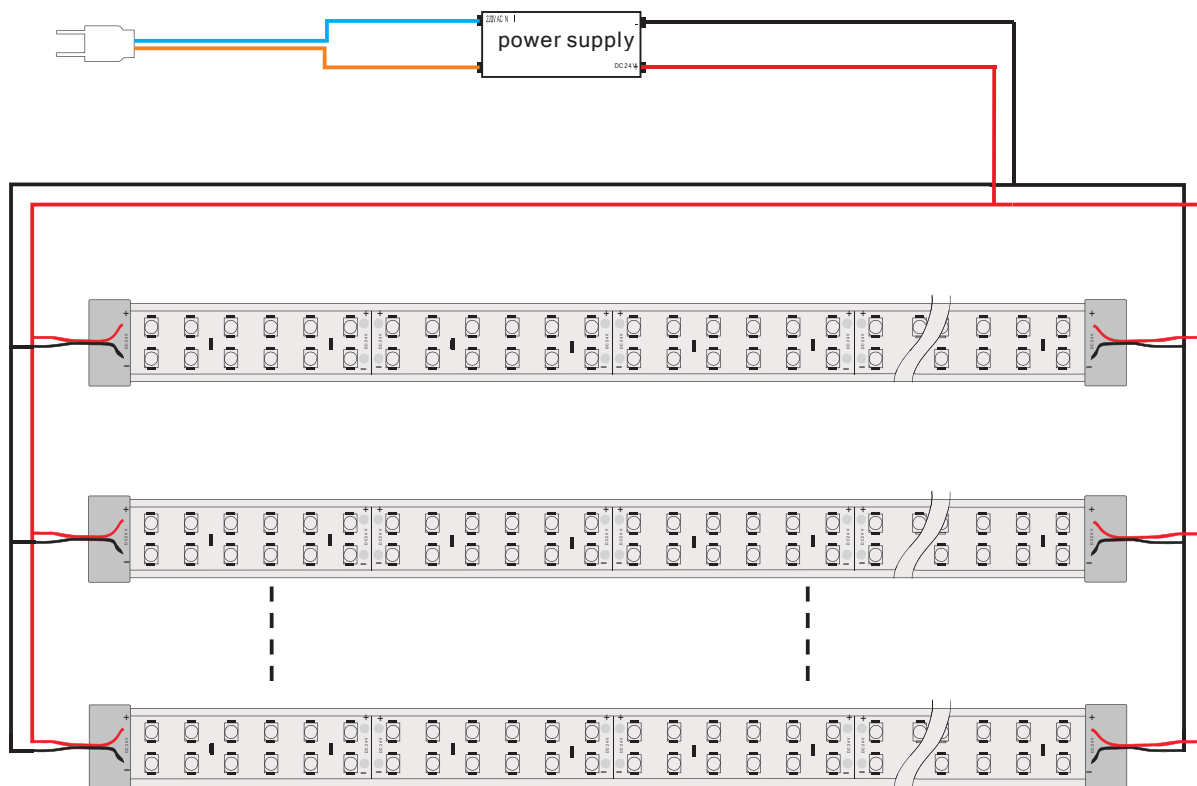

3528 Silicone cased series (240leds/m) packing



5meter/roll



1roll/bag



Carton 360X240X240mm

15bags/carton

Operation temperature: -20~50°C

Storage temperature: -30~80°C

Packing: 5meters led strip as one roll, one roll put into one bag, 15bags packed into one carton