

# Product Specification

## 3528 LED strip light

### (Ribbon series)

DN-FLW-R3528-CC-24-240D

Made by	Checked by	Date	Version
Biao Zhang	Rongwei Li	2014.08.15	A0



**SHENZHEN DINAM LED Co., LTD**

Phone: 0086-755-2306 3529

Fax: 0086-755-2306 3528

**Address:** B Building, Chuangfu Industrial Zone, Beihuan Road,  
Shiyan Town, Baoan District shenzhen China.

## 3528 Ribbon series (240leds/m) feature and photo

### Feature:

High brightness low power consumption

Led type: 3528 SMD led

Led lighting angle: 120°

Led quantity: 240leds/m


Operation temperature: -20-50°C

Life time: 50,000hours

Dimmable by using dimmer controller


Water-proof rating: IP20

### Photo:

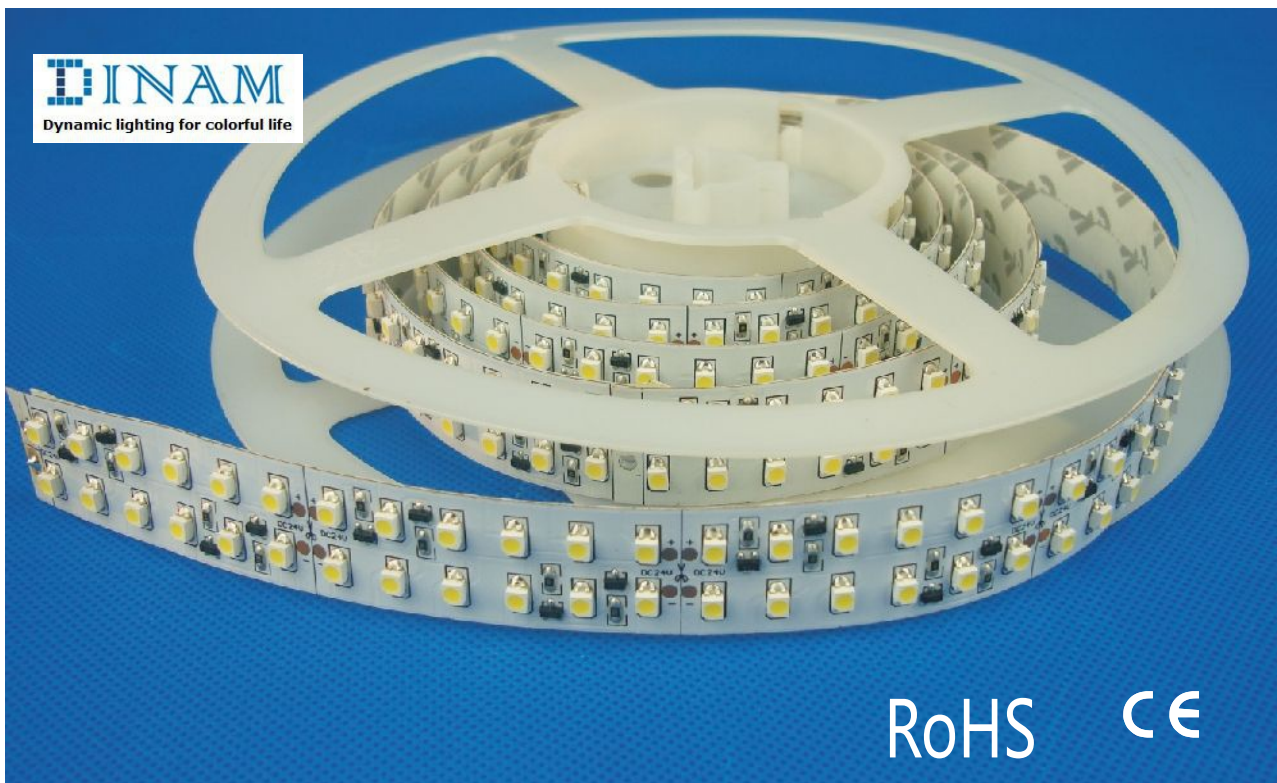

## 3528 Ribbon series ( 240leds/m ) dimension chart

Front:

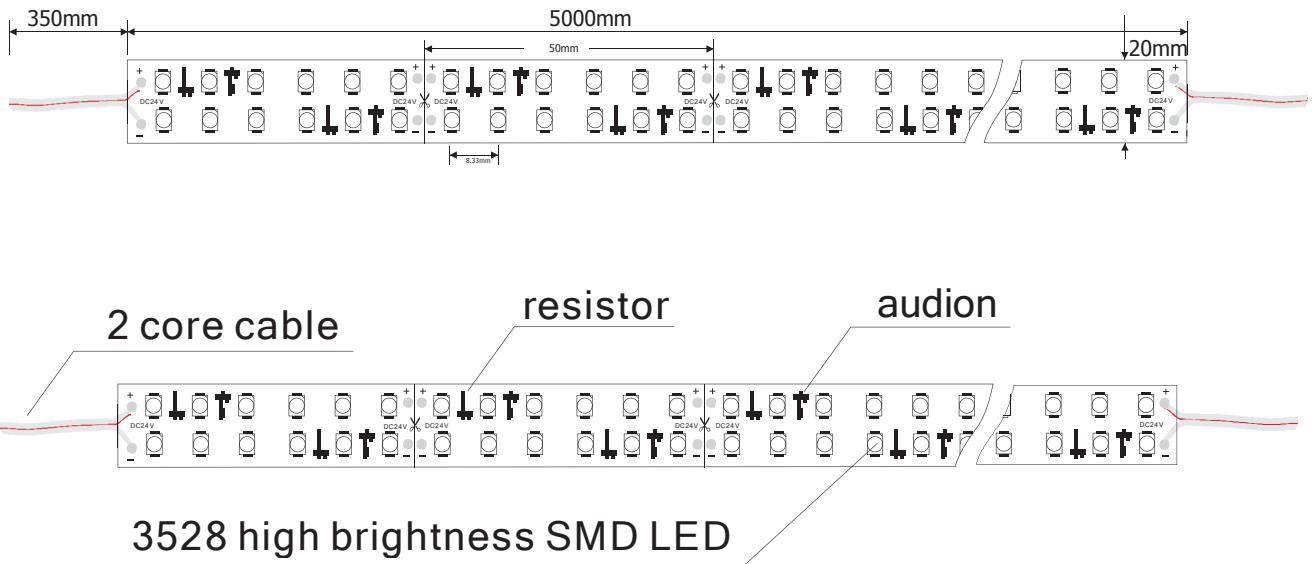




Lateral:



## 3528 ribbon series (240leds/m) photoelectric parameters

Ribbon series led strip: DC0.88A22-27Vpower:20W±10%/M IP rating:IP20

Part-Number	Color	PCB width	Lumen (CRI>80)	Lumen (CRI>90)
LD-FLW-R3528R/G/B/Y-CC-24-240D-AA	R/G/B/Y	20mm	-----	-----
LD-FLW-R3528W-CC-24-240D-AA	white	20mm	1680lm/m	1260lm/m
LD-FLW-R3528W-CC-24-240D-AAA	white	20mm	1764lm/m	1344lm/m
LD-FLW-R3528WW-CC-24-240D-AA	warm white	20mm	1325lm/m	1000lm/m
LD-FLW-R3528WW-CC-24-240D-AAA	warm white	20mm	1500lm/m	1180lm/m

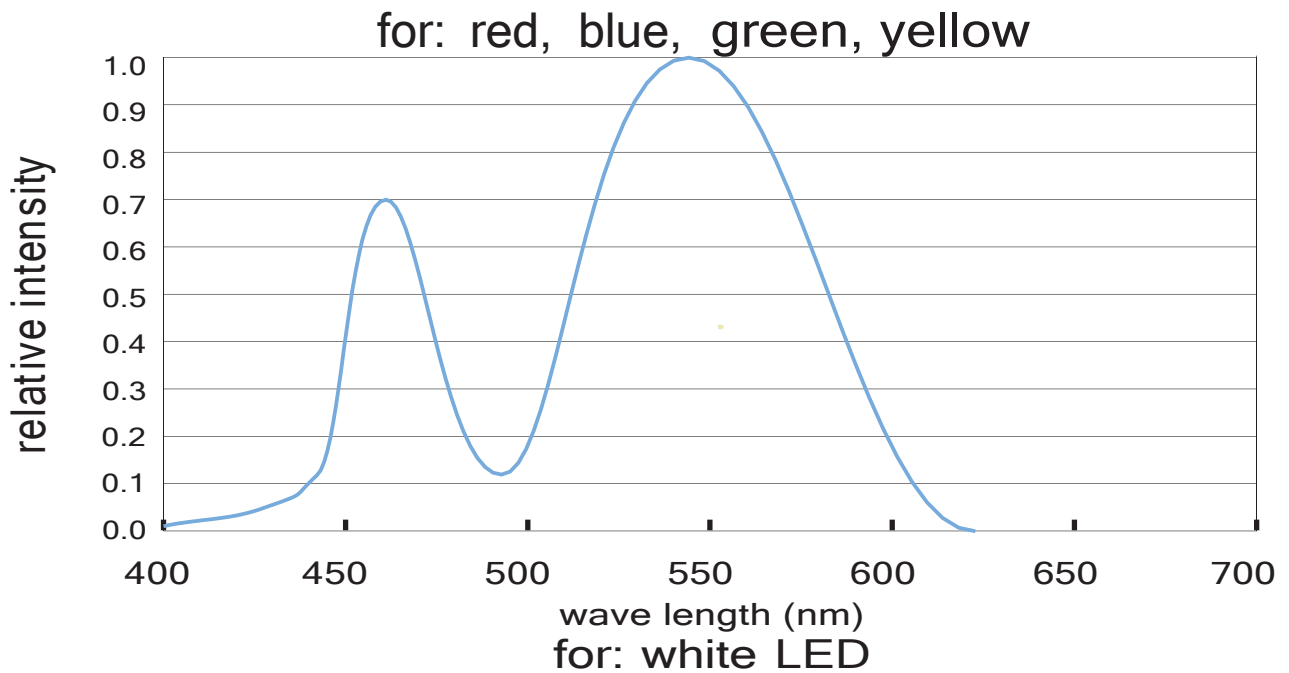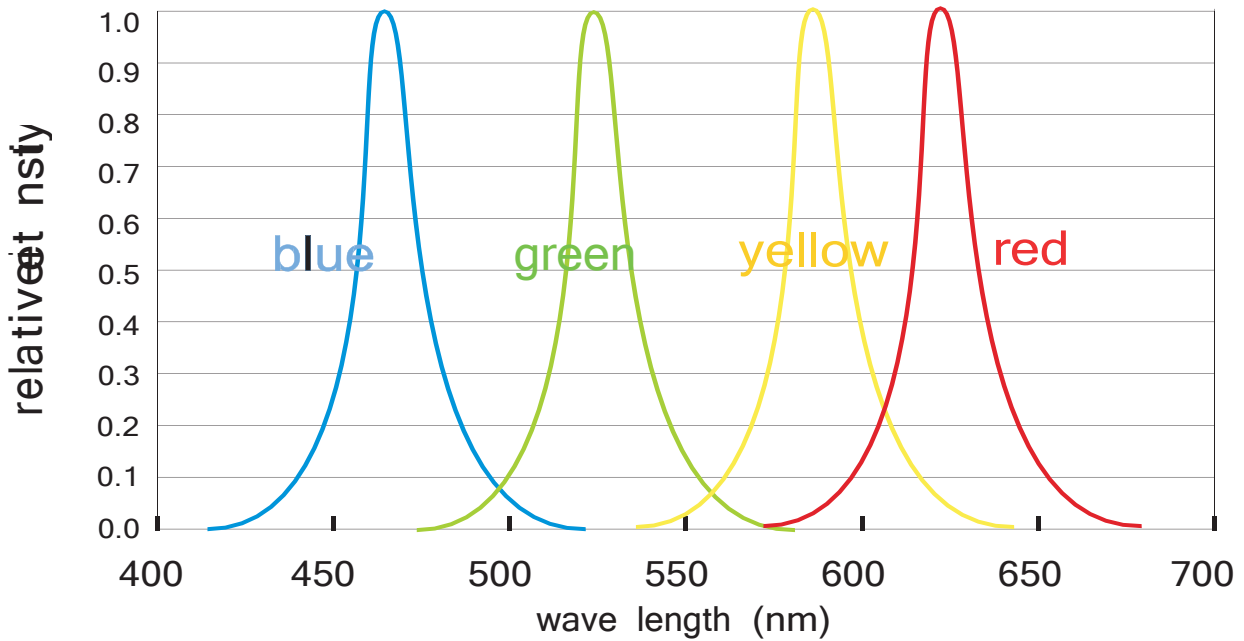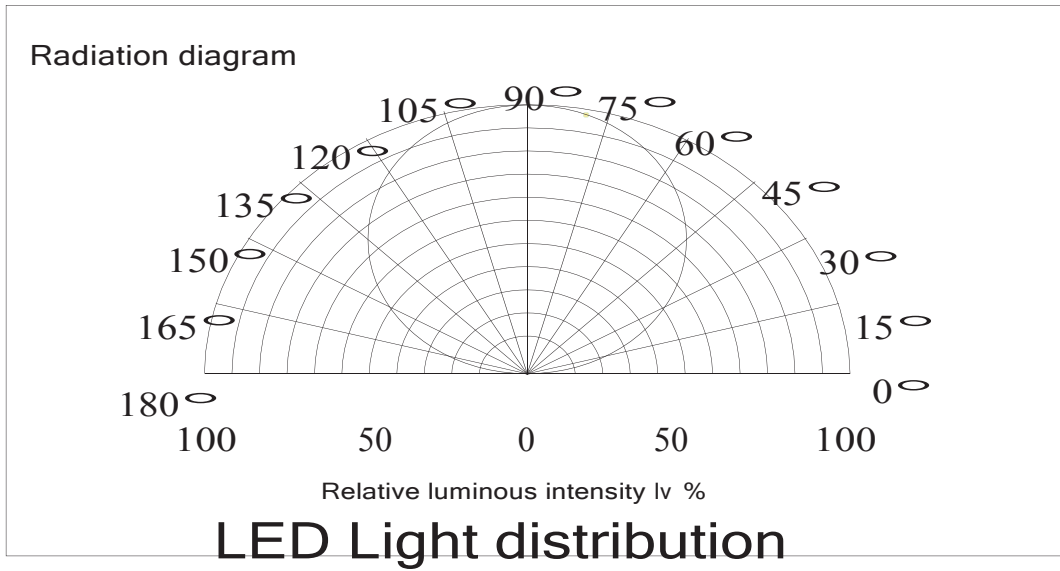


3528 ribbon series (240leds/m) connection ways



3528 ribbon series (240leds/m) packing



5meter/roll



1roll/bag



Carton360X240X240mm

15bags/carton

Operation temperature: -20~50°C

Storage temperature: -30~80°C

Packing: 5meters led strip as one roll, one roll put into one bag, 15bags packed into one carton