

# Product Specification

## 3014 LED strip light

### (Ribbon series)

#### DN-F3014-24-216S

Made by	Checked by	Date	Version
Biao Zhang	Rongwei Li	2015.01.05	A0



**SHENZHEN DINAM LED Co., LTD**

Phone: 0086-755-2306 3529

Fax: 0086-755-2306 3528


Address: B Building, Chuangfu Industrial Zone, Beihuan Road,  
Shiyan Town, Baoan District shenzhen China,

## 3014 Ribbon series (216leds/m) feature and photo

### Feature:


- DC24V low-voltage power supply, security and energy efficiency
- High brightness low power consumption
- Led type: 3014 SMD led
- Led lighting angle: 120°
- Led quantity: 216leds/m
- Operation temperature: -20-50°C
- Life time: 50,000hours
- Dimmable by using dimmer controller
- Water-proof rating: IP20

### Photo:

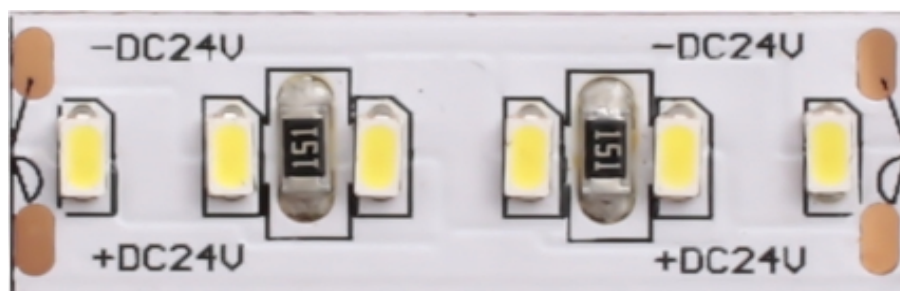


## 3014 Ribbon series ( 216leds/m ) dimension chart

### Front:

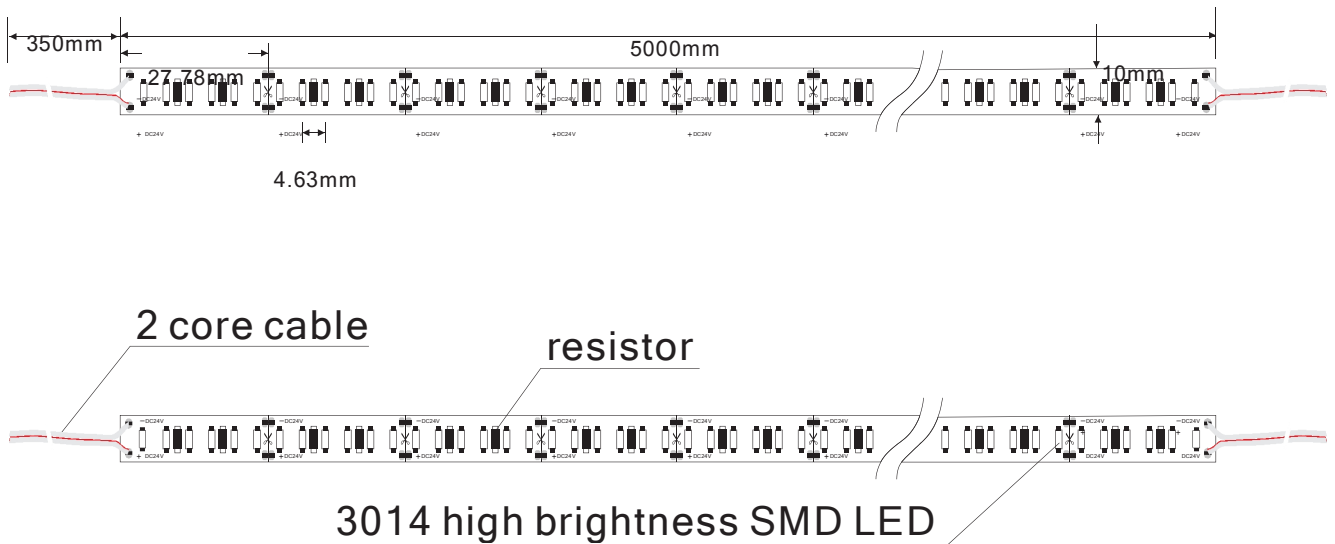



### Lateral:




## 3014 ribbon series (216leds/m) photoelectric parameters

Ribbon series led strip: 3014 SMD 216leds/m DC24V power:24W $\pm$ 10%/M IP rating:IP20

Part-Number	Color	PCB width	Lumen
DN-F3014W-24-216S-AA	white	10mm	2160lm/m

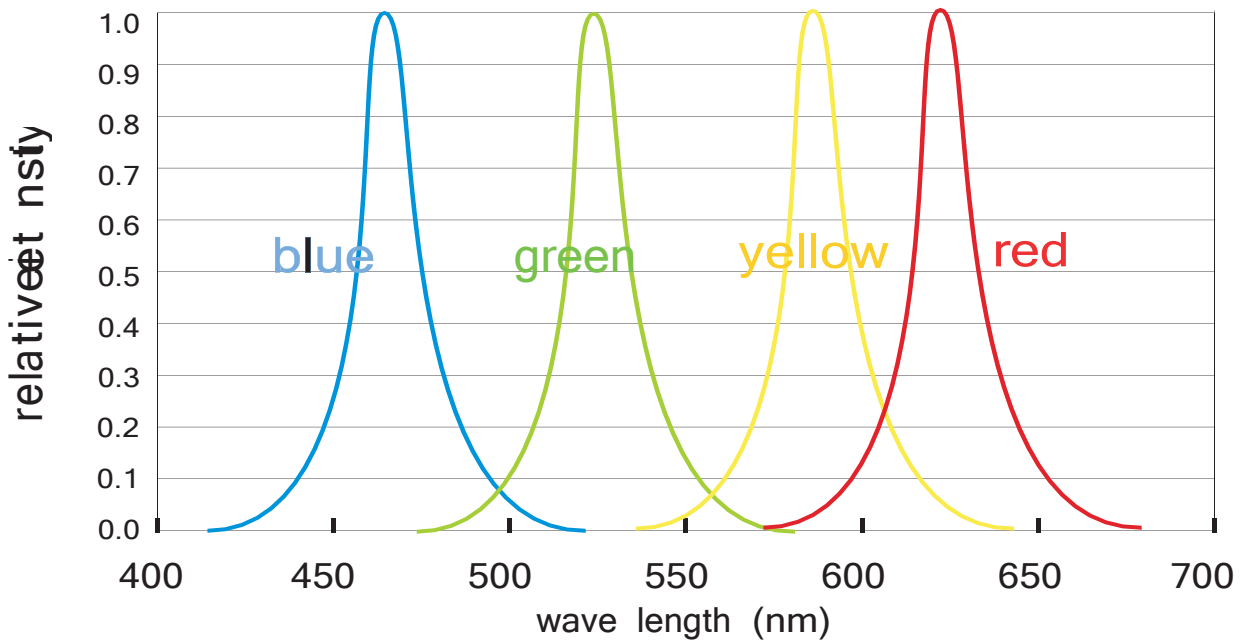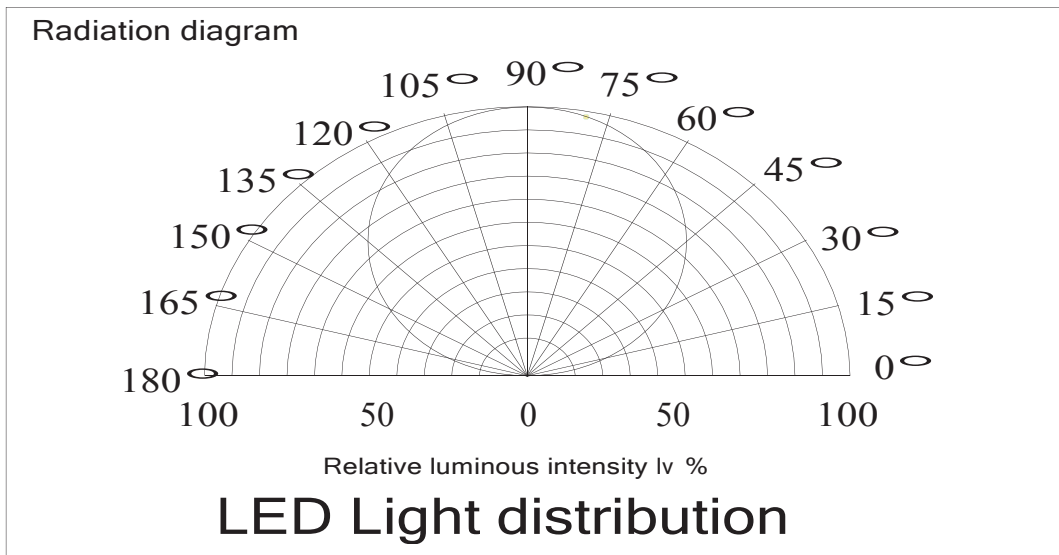

for: red, blue, green, yellow

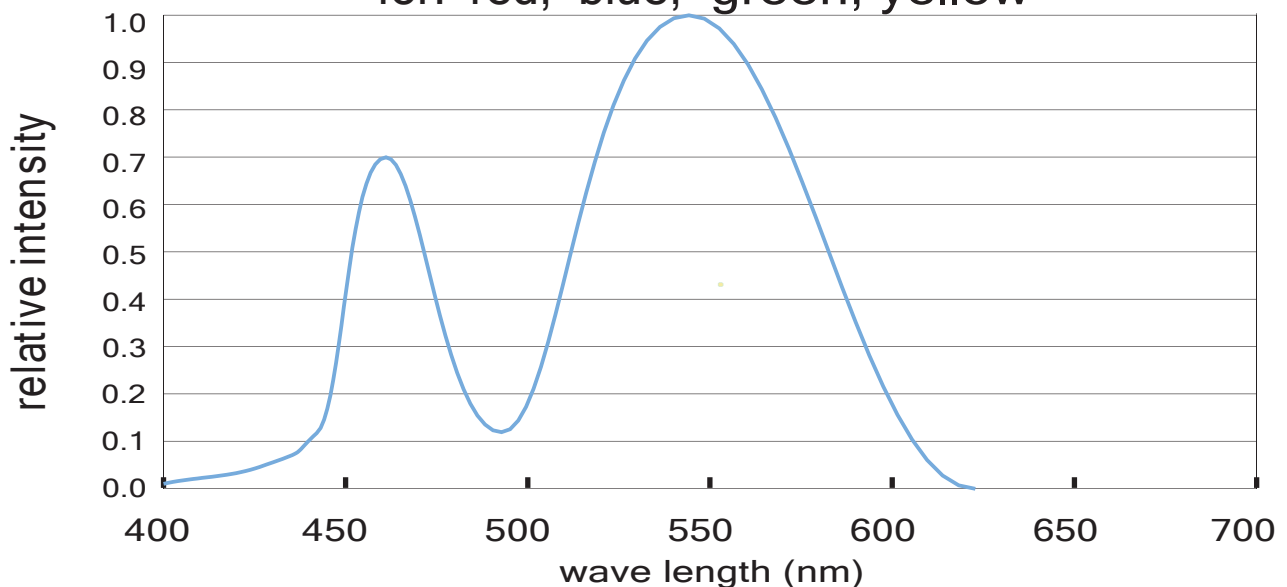

for: white LED

3014 ribbon series (216leds/m) connection ways



3014 ribbon series (216leds/m) packing



Operation temperature: -20~50°C

Storage temperature: -30~80°C

Packing: 5meters led strip as one roll, one roll put into one bag, 25bags packed into one carton