

Product Specification

5050 LED strip light

(Dropper series)

DN-FLW-D5050-12/24-60S

Made by	Checked by	Date	Version
Biao Zhang	Rongwei Li	2014.08.20	A0



SHENZHEN DINAM LED Co., LTD

Phone: 0086-755-2306 3529

Fax: 0086-755-2306 3528

Address: B Building, Chuangfu Industrial Zone, Beihuan Road,
Shiyan Town, Baoan District shenzhen China.

5050 Dropper series (60leds/m) feature and photo

Feature:

DC12/24V low-voltage power supply, security and energy efficiency

High brightness low power consumption

Led type: 5050 SMD led

Led lighting angle: 120°

Led quantity: 60leds/m

Operation temperature: -20-50°C

Life time: 50,000hours

Dimmable by using dimmer controller


Water-proof rating: IP62

Photo:



5050 Dropper series (60leds/m) dimension chart

Front:

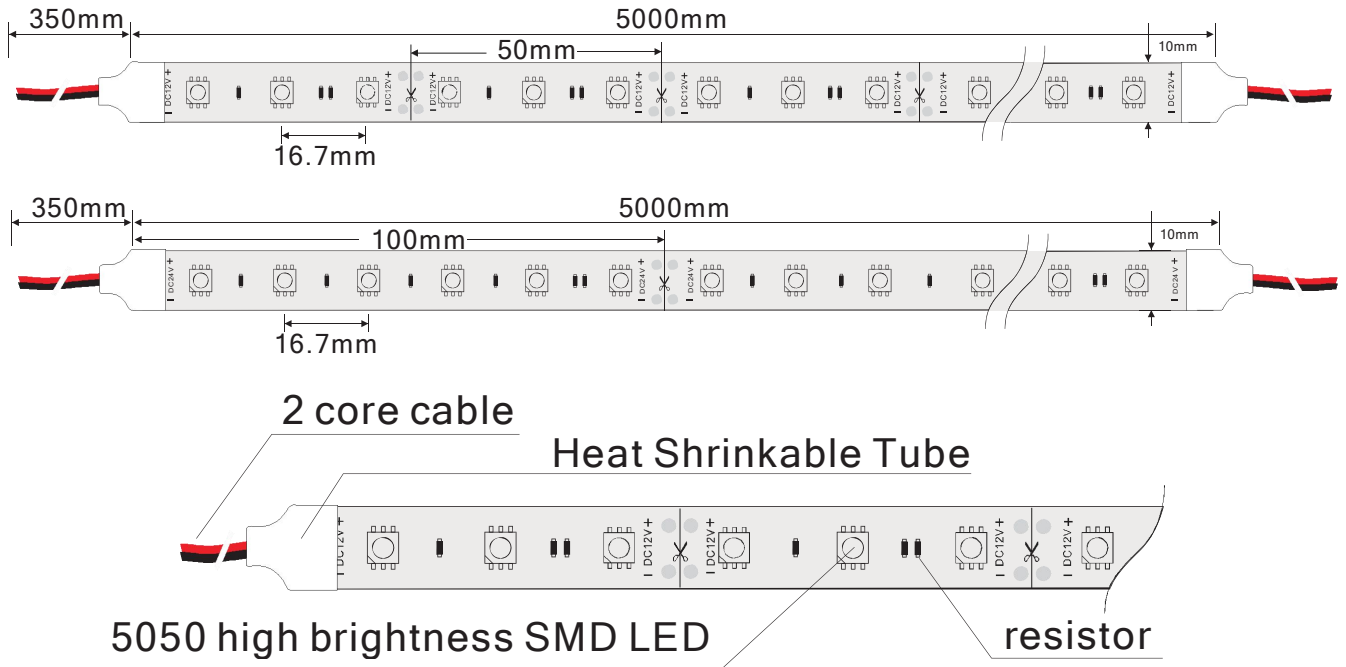



Lateral:




5050 Dropper series (60leds/m) photoelectric parameters

Dropper series led strip: 5050 SMD 60leds/m DC12/24V power: 13.2W±10%/M IP rating:IP62

Part-Number	Color	PCB width	Lumen (CRI>80)	Lumen (CRI>90)
LD-FLW-D5050R/G/B/Y/RGB-12/24-60S-AA	R/G/B/Y	10mm	-----	-----
LD-FLW-D5050W-12/24-60S-AA	white	10mm	945lm/m	706lm/m
LD-FLW-D5050W-12/24-60S-AAA	white	10mm	970lm/m	760lm/m
LD-FLW-D5050WW-12/24-60S-AA	warm white	10mm	740lm/m	564lm/m
LD-FLW-D5050WW-12/24-60S-AAA	warm white	10mm	840lm/m	676lm/m

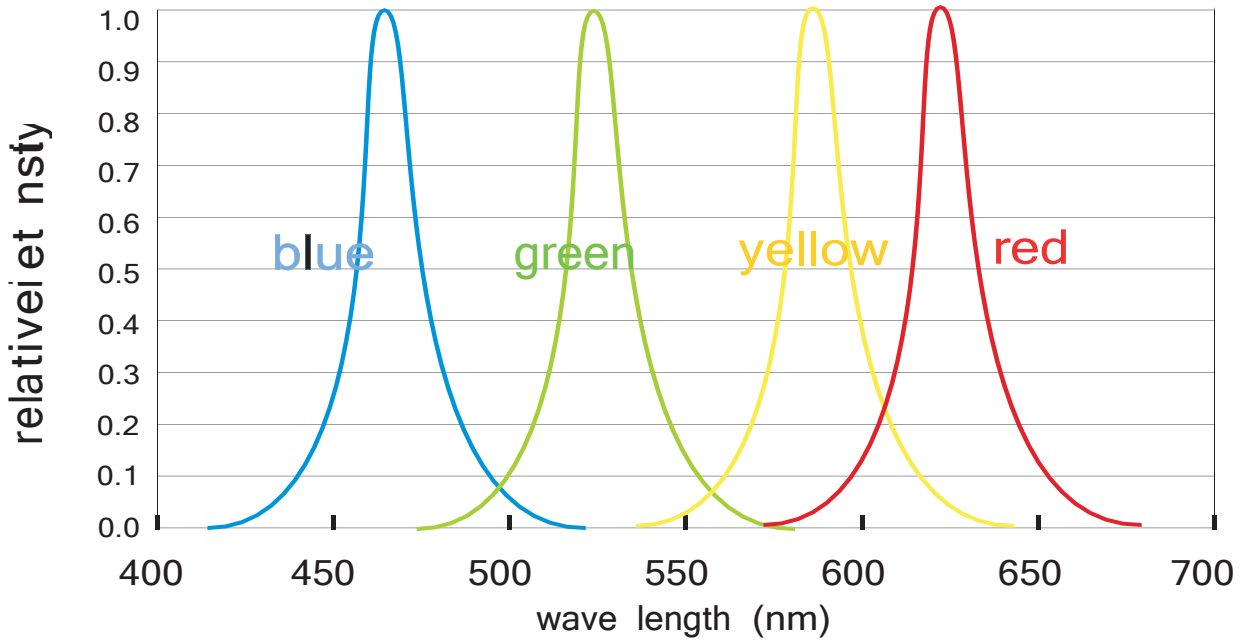
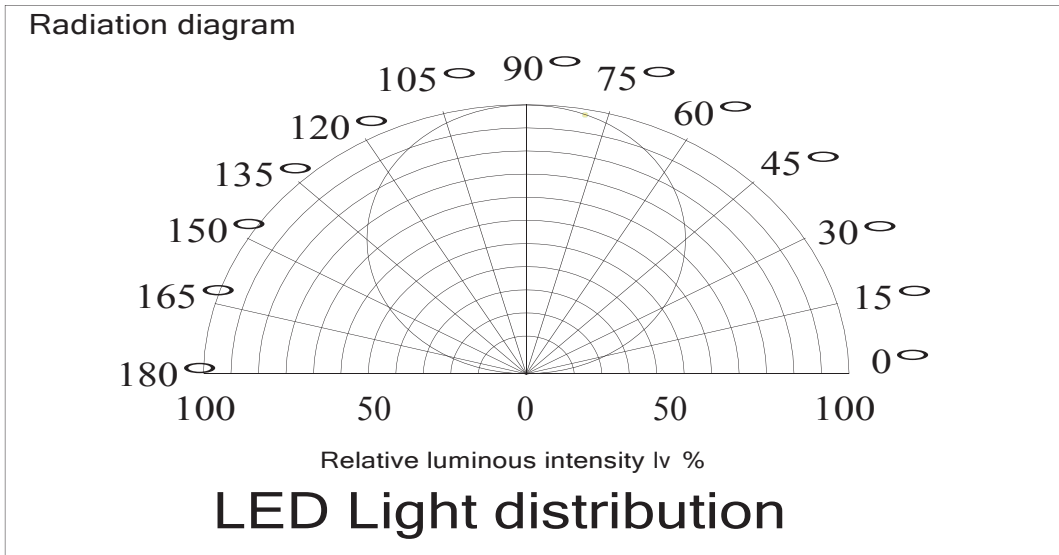


for: red, blue, green, yellow

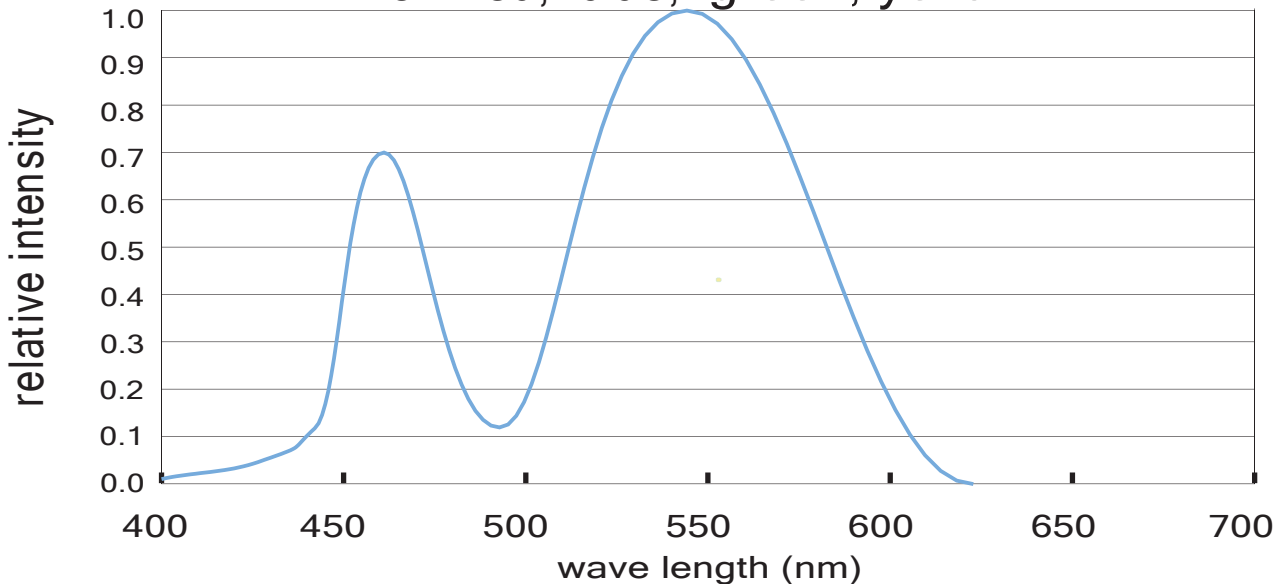


for: white LED


5050 Dropper series (60leds/m) connection ways

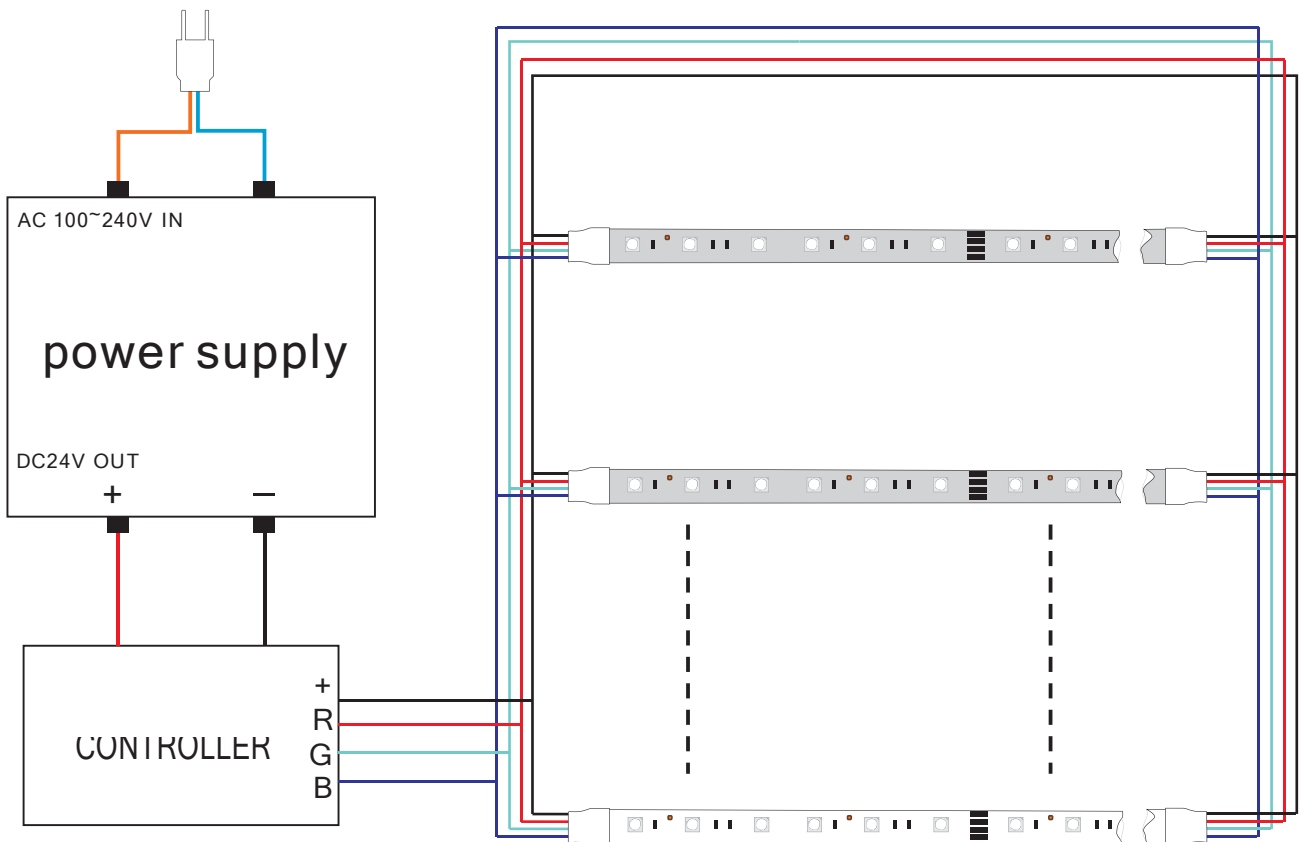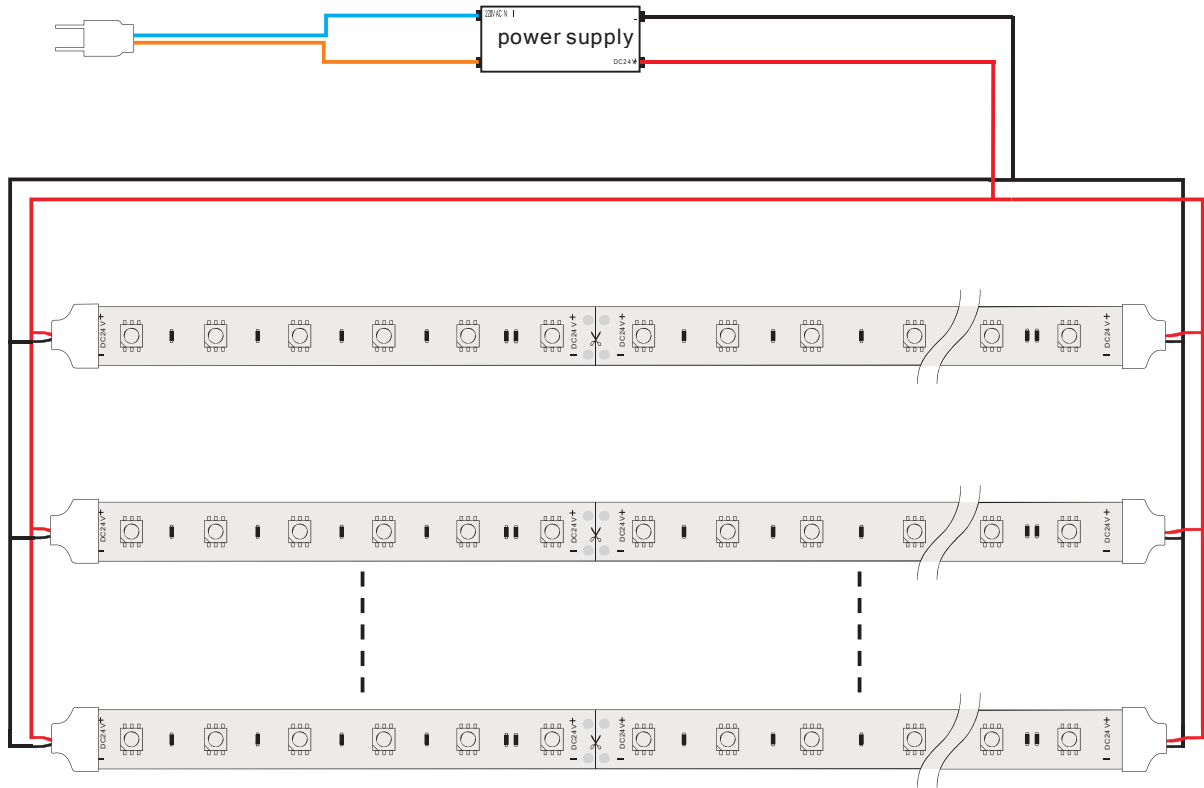

5050 Dropper series (60leds/m) packing



5meter/roll



1roll/bag



Carton360X240X240mm

20bags/carton

Operation temperature: -20~50°C

Storage temperature: -30~80°C

Packing: 5meters led strip as one roll, one roll put into one bag, 20bags packed into one carton